


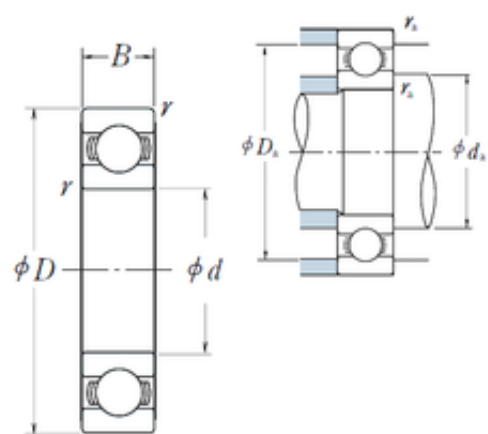

Bearing No. 6010

r	1
d	50 mm
D	80 mm
B	16 mm
C	16 mm
fo	15.6
D_	80
B_	16
ra	1
Z_	14
C0	16.6
DI_	57.269
SRE	4.52
D_a	75
DE_	74.731
SRI	4.52
DA_	8.731
SREN	-0.02
Noun	Bearing
SRIN	-0.02
bomp	0
SRIX	0.02
yobi	6010
mass	0.261
SDM_	66
KBRG	6101
SREX	0.02
SBRG	10
Bore	1.969 Inch 50 Millimeter

LangID	1
Weight	0,261 Kg
r min.	1 mm
ALPHA_	0
C_conv	21800
da min	55
UNSPSC	31171504
da max	58,5 mm
Oil rpm	10000
GRS rpm	8500
ra max.	1 mm
hidYobi	6010
Da max.	75 mm
da min.	55 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Inventory	1.0
Snap Ring	No
Enclosure	Open
Size (mm)	50x80x16
Prod_Type3	DGBB_SR_OT
bore type:	Round
Width (mm)	16
Weight / LBS	0.26
Inch - Metric	Metric
closure type:	Open
Product Group	B00308
Cage Material	Steel
Keyword String	Ball
overall width:	16 mm
Bearing number	6010
bore diameter:	50 mm

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	3.15 Inch 80 Millimeter
Long Description	50MM Bore; 80MM Outside Diameter; 16MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.63 Inch 16 Millimeter
Weight / Kilogram	0.12
Manufacturer Name	NSK
outside diameter:	80 mm
Internal Clearance	C0-Medium
Bore Diameter (mm)	50
Outer Diameter (mm)	80
internal clearance:	Normal Clearance
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	10 000 r/min
manufacturer upc number:	029176012976
Manufacturer Item Number	6010
Internal Special Features	No
(Grease) Lubrication Speed	8 500 r/min
Basic dynamic load rating (C)	21,8 kN
Basic static load rating (C0)	16,6 kN

Maximum Capacity / Filling Slot	No
------------------------------------	----