


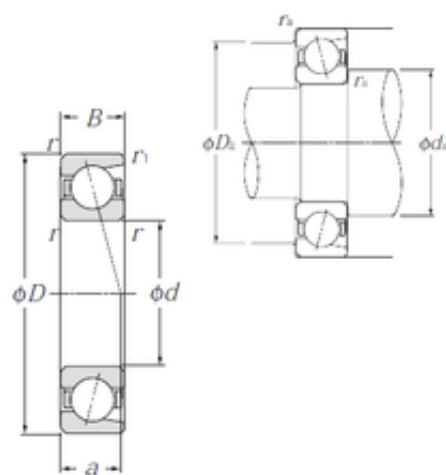

Bearing No. 7000

D	26 mm
d	10 mm
B	8 mm
C	8 mm
a	9 mm
Bore	0.394 Inch 10 Millimeter
Noun	Bearing
Mass	0.02 kg
Width	0.315 Inch 8 Millimeter
Weight	0,023 Kg
UNSPSC	31171531
ra max	0.15 mm
Db max	24.8 mm
da min	12.5 mm
rs min	0.3 mm
Da max	23.5 mm
r min.	0,3 mm
db min	12,5 mm
ra max.	0,3 mm
da min.	12,5 mm
r1a max	0.15 mm
r1 min.	0,15 mm
r1s min	0.15 mm
Category	Angular Contact Ball Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	10x26x8
Snap Ring	No
Nlim (oil)	39,000 rpm

Width (mm)	8
Flush Ground	No
Contact Angle	30 Degree
Cage Material	Steel
Nlim (grease)	29,000 rpm
Inch - Metric	Metric
Product Group	B00308
Keyword String	Angular Contact
Bearing number	7000
Static load, C0	2.07 kN
Angle (?)	25 °
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Dynamic load, C	4.65 kN
Outside Diameter	1.024 Inch 26 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	10MM Bore; 26MM Outside Diameter; 8MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 30 Degree; 1 (Single)
Contact angle ?	30 °
Manufacturer Name	NTN
Weight / Kilogram	0.021
Bore Diameter (mm)	10
Number of Bearings	1 (Single)
Internal Clearance	C0-Medium
Outer Diameter (mm)	26
Minimum Buy Quantity	N/A

Fatigue limit load, Cu	0.09 kN
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Single Row
Manufacturer Item Number	7000
(Grease) Lubrication Speed	29 000 r/min
Basic static load rating (C0)	2,07 kN
Basic dynamic load rating (C)	4,65 kN
Maximum Capacity / Filling Slot	No
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C