




Bearing No. HM911244/JHM911211

|                                 |                    |
|---------------------------------|--------------------|
| R                               | 3,6 mm             |
| a                               | 7,9 mm             |
| d                               | 59,987 mm          |
| D                               | 130 mm             |
| T                               | 34,1 mm            |
| B                               | 30,924 mm          |
| C                               | 22,649 mm          |
| r                               | 3,3 mm             |
| Ab                              | 4,2 mm             |
| Aa                              | 5 mm               |
| Db                              | 109 mm             |
| da                              | 74,5 mm            |
| db                              | 84 mm              |
| Da                              | 123 mm             |
| Weight                          | 1,98 Kg            |
| Size (mm)                       | 59.987x130x34.1    |
| Width (mm)                      | 34,1               |
| Factor (K)                      | 0,71               |
| Factor (G1)                     | 56,4               |
| Factor (Cg)                     | 0,0214             |
| Factor (G2)                     | 16,5               |
| Bearing number                  | HM911244/JHM911211 |
| Bore Diameter (mm)              | 59,987             |
| Outer Diameter (mm)             | 130                |
| Calculation factor (e)          | 0,82               |
| Basic static load rating (C0)   | 183 kN             |
| Basic dynamic load rating (C1)  | 154 kN             |
| Basic dynamic load rating (C90) | 40                 |

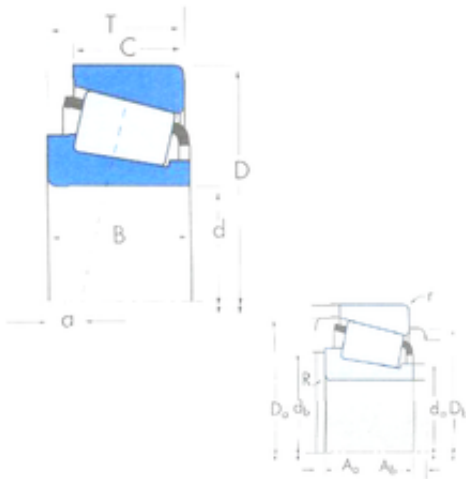

|                                  |      |
|----------------------------------|------|
| Basic dynamic load rating (Ca90) | 56,2 |
|----------------------------------|------|