


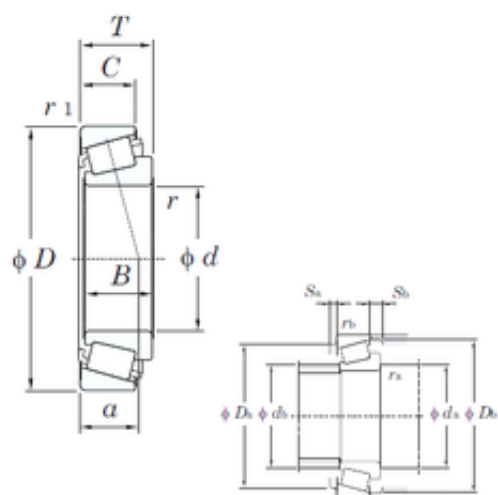

Bearing No. 30307DJR

D	80 mm
d	35 mm
T	22,75 mm
B	21 mm
C	15 mm
a	26,8 mm
e	0.83
Cr	78.7
Cu	9.85
Y0	0.40
Y1	0.73
C0r	69.1
Bore	1.378 Inch 35 Millimeter
Noun	Bearing
a(mm)	26.8
Da min	66 mm
da max	44 mm
Weight	0,536 Kg
r min.	2 mm
r(min)	2
UNSPSC	31171516
Db(min)	76.5
db(max)	44
Da(max)	70
Da(min)	66
r1(min)	1.5
Sa(min)	3
Sb(min)	7.5
ra(max)	2

rb(max)	1.5
da(min)	45
ra max.	2 mm
Db min.	76,5 mm
Da max.	70 mm
da min.	45 mm
r2 min.	1,5 mm
rb max.	1,5 mm
Oil lub.	6000
Category	Tapered Roller Bearings Assembly
Size (mm)	35x80x22.75
Component	Assembly
Inventory	0.0
Width (mm)	22,75
Grease lub.	4300
Bearing No.	30307DJR
Basic Number	30307
Weight / LBS	1.182
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity Steep Contact Angle
Keyword String	Tapered
Assembly Width	0.896 Inch 22.75 Millimeter
Bearing number	30307DJR
Precision Class	Standard
(Refer.)Mass(kg)	0.536
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 35MM Bore; 80MM Outside Diameter; 22.75MM

	Assembly Width; Single Row of Rollers
Outside Diameter	3.15 Inch 80 Millimeter
Weight / Kilogram	0.54
Manufacturer Name	KOYO
Bore Diameter (mm)	35
Outer Diameter (mm)	80
Minimum Buy Quantity	N/A
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Calculation factor (e)	0,83
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	6000 r/min
Calculation factor (Y0)	0,4
Manufacturer Item Number	30307DJR
(Grease) Lubrication Speed	4300 r/min
Basic static load rating (C0)	69,1 kN
Basic dynamic load rating (C)	63,1 kN