


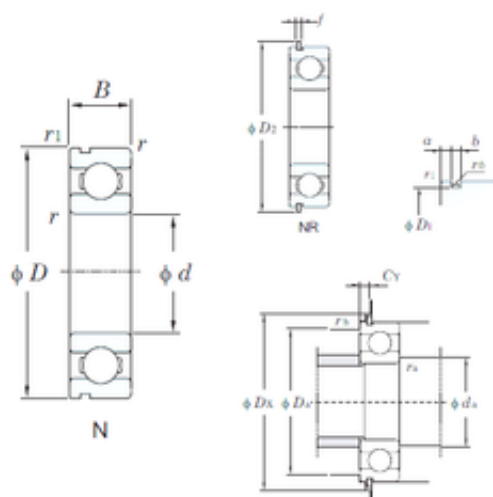

Bearing No. 6010N

|                               |            |
|-------------------------------|------------|
| C                             | 16 mm      |
| a                             | 2,49 mm    |
| f                             | 1,65 mm    |
| b                             | 2,05 mm    |
| d                             | 50 mm      |
| D                             | 80 mm      |
| B                             | 16 mm      |
| D1                            | 76,81 mm   |
| D2                            | 86,6 mm    |
| Weight                        | 0,261 Kg   |
| r min.                        | 1 mm       |
| da min.                       | 55 mm      |
| Da max.                       | 75 mm      |
| r0 max.                       | 0,6 mm     |
| r1 min.                       | 0,5 mm     |
| Size (mm)                     | 50x80x16   |
| Width (mm)                    | 16         |
| Bearing number                | 6010N      |
| Bore Diameter (mm)            | 50         |
| Outer Diameter (mm)           | 80         |
| (Oil) Lubrication Speed       | 9900 r/min |
| (Grease) Lubrication Speed    | 8400 r/min |
| Basic dynamic load rating (C) | 21,8 kN    |
| Basic static load rating (C0) | 16,6 kN    |