


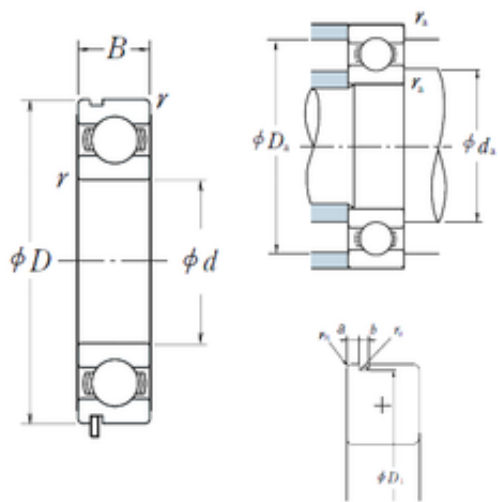

Bearing No. 6010N

|      |          |
|------|----------|
| a    | 2,49 mm  |
| r    | 1        |
| d    | 50 mm    |
| D    | 80 mm    |
| B    | 16 mm    |
| C    | 16 mm    |
| b    | 1,9 mm   |
| fo   | 15.6     |
| B_   | 16       |
| ra   | 1        |
| C0   | 16.6     |
| D1   | 76,81 mm |
| D_   | 80       |
| Z_   | 14       |
| rn   | 0,5 mm   |
| ro   | 0.6      |
| DE_  | 74.731   |
| SRI  | 4.52     |
| D_a  | 75       |
| DA_  | 8.731    |
| SRE  | 4.52     |
| DI_  | 57.269   |
| yobi | 6010N    |
| mass | 0.261    |
| SBRG | 10       |
| bomp | 0        |
| KBRG | 6101     |
| SREX | 0.02     |
| SREN | -0.02    |
| SRIN | -0.02    |
|      |          |

|                               |              |
|-------------------------------|--------------|
| SDM_                          | 66           |
| SRIX                          | 0.02         |
| ALPHA_                        | 0            |
| r min.                        | 1 mm         |
| C_conv                        | 21800        |
| da max                        | 58,5 mm      |
| da min                        | 55           |
| Weight                        | 0,261 Kg     |
| LangID                        | 1            |
| ra max.                       | 1 mm         |
| Da max.                       | 75 mm        |
| Oil rpm                       | 10000        |
| da min.                       | 55 mm        |
| r0 max.                       | 0,6 mm       |
| hidYobi                       | 6010N        |
| GRS rpm                       | 8500         |
| hidTable                      | ecat_NSRDGB  |
| Size (mm)                     | 50x80x16     |
| Prod_Type3                    | DGBB_SR_N_OT |
| Width (mm)                    | 16           |
| Bearing number                | 6010N        |
| Bore Diameter (mm)            | 50           |
| Outer Diameter (mm)           | 80           |
| (Oil) Lubrication Speed       | 10 000 r/min |
| (Grease) Lubrication Speed    | 8 500 r/min  |
| Basic dynamic load rating (C) | 21,8 kN      |
| Basic static load rating (C0) | 16,6 kN      |