


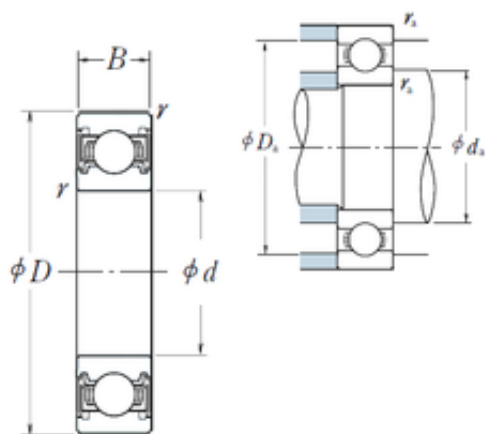

Bearing No. 6010VV

r	1
d	50 mm
D	80 mm
B	16 mm
C	16 mm
D_	80
B_	16
ra	1
C0	16.6
fo	15.6
Z_	14
DI_	57.269
SRE	4.52
D_a	75
DE_	74.731
DA_	8.731
SRI	4.52
SREN	-0.02
SBRG	10
SREX	0.02
KBRG	6151
Bore	1.969 Inch 50 Millimeter
mass	0.261
Noun	Bearing
SRIX	0.02
SRIN	-0.02
SDM_	66
bomp	0
yobi	6010VV

Weight	0,261 Kg
da min	55
LangID	1
da max	58,5 mm
C_conv	21800
ALPHA_	0
UNSPSC	31171504
r min.	1 mm
hidYobi	6010VV
ra max.	1 mm
GRS rpm	8500
Da max.	75 mm
da min.	55 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Snap Ring	No
Size (mm)	50x80x16
Enclosure	2 Seals
Inventory	0.0
Width (mm)	16
bore type:	Round
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.26
Product Group	B00308
Cage Material	Steel
closure type:	Double Sealed
Inch - Metric	Metric
Bearing number	6010VV
Keyword String	Ball
overall width:	16 mm
Enclosure Type	Non-Contact Seal
bore diameter:	50 mm

Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	50MM Bore; 80MM Outside Diameter; 16MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outside Diameter	3.15 Inch 80 Millimeter
Manufacturer URL	http://www.nskamericas.com
Manufacturer Name	NSK
Weight / Kilogram	0.26
outside diameter:	80 mm
Bore Diameter (mm)	50
Internal Clearance	C0-Medium
Outer Diameter (mm)	80
internal clearance:	Normal Clearance
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6010VV
manufacturer upc number:	029176013003
Internal Special Features	No
(Grease) Lubrication Speed	8 500 r/min
Basic static load rating (C0)	16,6 kN
Basic dynamic load rating (C)	21,8 kN
Maximum Capacity / Filling Slot	No

