


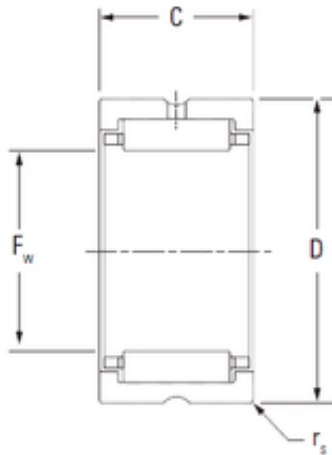

Bearing No. HJ-202820

D	44,45 mm
C	31,75 mm
Da	39.67
Cr	31.75
Fw	31,75 mm
Cu	11.7
C0r	75.2
Noun	Bearing
Bore	1.25 Inch 31.75 Millimeter
Width	1.25 Inch 31.75 Millimeter
UNSPSC	31171512
Weight	0,145 Kg
rs(min)	1.02
r5 min.	1,02 mm
Category	Needle Non Thrust Roller Bearing
Oil lub.	14000
Retainer	Yes
Enclosure	Open
Separable	No
Inventory	76.0
Size (mm)	31.75x44.45x31.75
Component	Roller Assembly with Outer Ring - No Inner Ring
Width (mm)	31,75
Closed End	No
Grease lub.	9100
Bearing No.	HJ-202820
Weight / LBS	0.32

Product Group	B04144
Inch - Metric	Inch
Self Aligning	No
Keyword String	Needle
Bearing number	HJ-202820
Other Features	2 Rib Outer Ring Steel Cage Heavy Duty Oil Hole
Thrust Bearing	No
Relubricatable	Yes
Rolling Element	Needle Roller Bearing
(Refer.)Mass(kg)	0.145
Outside Diameter	1.75 Inch 44.45 Millimeter
Long Description	1-1/4" Bore; 1-3/4" Outside Diameter; 1-1/4" Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Yes Retainer; Single Row of
Manufacturer URL	http://www.koyousa.com
Weight / Kilogram	0.15
Manufacturer Name	KOYO
Bore Diameter (mm)	31,75
Outer Diameter (mm)	44,45
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.40.00.00
Used with inner ring No.	IR-162020
Manufacturer Item Number	HJ-202820
Number of Rows of Rollers	Single Row
(Grease) Lubrication	14000 r/min

Speed	
Clearance fit S(h6)(max.)	31.750
Clearance fit S(h6)(min.)	31.735
Clearance fit H(H7)(max.)	44.475
Clearance fit H(H7)(min.)	44.450
Basic dynamic load rating (C)	46,3 kN
Basic static load rating (C0)	75,2 kN
Tight transition fit S(f6)(max.)	31.725
Tight transition fit S(f6)(min.)	31.709
Tight transition fit H(N7)(max.)	44.442
Tight transition fit H(N7)(min.)	44.417