


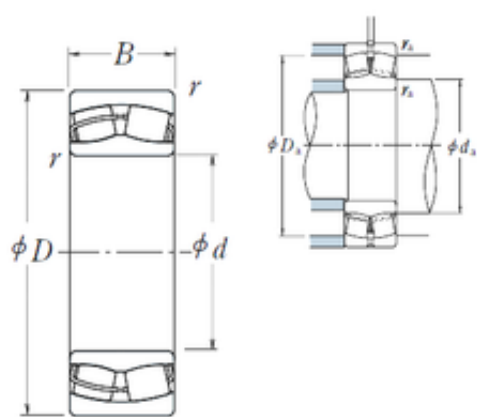

Bearing No. 23226CE4

e	0.34
r	3
d	130 mm
D	230 mm
B	80 mm
C	80 mm
Y3	2
C0	1080
X2	0.67
X1	1
X0	1
Y0	1.9
ra	2.5
Z_	19
B_	80
Y2	2.9
D_	230
Y1	2
DE_	204.754
SIR	32
DA_	25
DI_	156.003
ALP3	0
KBRG	2322
Noun	Bearing
mass	14.3
SDM_	180.379
yobi	23226CE4
Bore	5.118 Inch 130 Millimeter

bomp	23226CE4
ALP2	50
ALP1	12
SBRG	32
Width	3.15 Inch 80 Millimeter
Da min	196 mm
UNSPSC	31171510
Weight	14,3 Kg
ALPHA_	0.224
da max	150 mm
da min	144
r min.	3 mm
LangID	1
da min.	144 mm
hidYobi	23226CE4
GRS rpm	1200
Oil rpm	1600
TSR rpm	2000
Da max.	216 mm
ra max.	2,5 mm
D_a max	216
series:	232
D_a min	196
hidTable	ecat_NSSPHR
Category	Spherical Roller Bearing
Enclosure	Open
Inventory	0.0
Size (mm)	130x230x80
Macha rpm	0
Width (mm)	80
Prod_Type3	SRB_CTB_CB
bore type:	Straight

cage type:	Inner Ring Guided
Weight / LBS	14.5
Bore Profile	Straight
maximum rpm:	1600 RPM
closure type:	Open
Product Group	B04311
Inch - Metric	Metric
Cage Material	Steel
Bearing number	23226CE4
overall width:	80 mm
bore diameter:	130 mm
Relubricatable	Yes
fillet radius:	3 mm
Keyword String	Spherical
cage material:	Steel
Mounting Method	Shaft Mount
Rolling Element	Spherical Roller Bearing
finish/coating:	Uncoated
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	9.055 Inch 230 Millimeter
Long Description	130MM Straight Bore; 230MM Outside Diameter; 80MM Width; C0-Medium Clearance; Shaft Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable
outer ring type:	Not Split
outside diameter:	230 mm
Withdrawal Sleeve	Not Applicable
bearing material:	Steel

Manufacturer Name	NSK
Weight / Kilogram	14.5
outer ring width:	80 mm
precision rating:	RBEC 1 (ISO Class Normal)
Bore Diameter (mm)	130
Internal Clearance	C0-Medium
Adapter Part Number	Not Applicable Inch Not Applicable Millimeter
Outer Diameter (mm)	230
internal clearance:	C0
Minimum Buy Quantity	N/A
static load capacity:	1080000 N
Calculation factor (e)	0,34
lubrication hole type:	Lubrication Groove & Hole
dynamic load capacity:	700000 N
Harmonized Tariff Code	84823080
Calculation factor (Y2)	2,9
(Oil) Lubrication Speed	1600 r/min
Calculation factor (Y0)	1,9
Manufacturer Item Number	23226CE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1200 r/min
operating temperature range:	Maximum of +200 °C
Basic static load rating (C0)	1080 kN
Basic dynamic load rating (C)	700 kN