


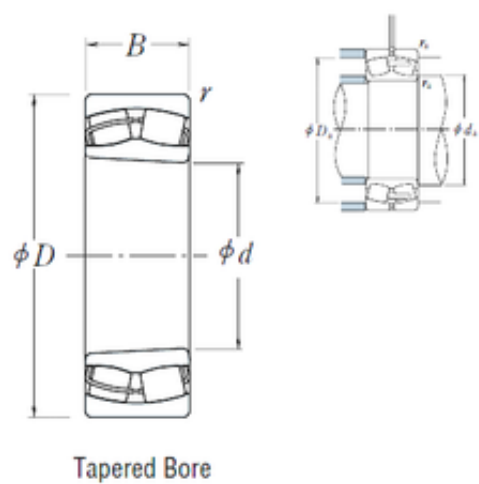

Bearing No. 23226CKE4

e	0.34
r	3
d	130 mm
D	230 mm
B	80 mm
C	80 mm
D_	230
X0	1
Y2	2.9
X2	0.67
X1	1
ra	2.5
C0	1080
Z_	19
Y0	1.9
B_	80
Y3	2
Y1	1.9
DE_	204.754
SIR	32
DA_	25
DI_	156.003
ALP3	0
yobi	23226CKE4
SBRG	32
KBRG	2322
mass	14.3
Bore	5.118 Inch 130 Millimeter
SDM_	180.379

Noun	Bearing
ALP2	50
bomp	23226CKE4
ALP1	12
Width	3.15 Inch 80 Millimeter
ALPHA_	0.224
da min	144
LangID	1
Weight	14,3 Kg
r min.	3 mm
UNSPSC	31171510
Da min	196 mm
da max	150 mm
D_a min	196
Oil rpm	1600
D_a max	216
GRS rpm	1200
TSR rpm	2000
da min.	144 mm
Da max.	216 mm
hidYobi	23226CKE4
ra max.	2,5 mm
Category	Spherical Roller Bearing
hidTable	ecat_NSSPHR
Size (mm)	130x230x80
Enclosure	Open
Inventory	0.0
Macha rpm	0
Prod_Type3	SRB_CTB_TB
Width (mm)	80
bore type:	Tapered 1:12
Weight / LBS	14.19

Bore Profile	Tapered
Inch - Metric	Metric
Product Group	B04311
Cage Material	Steel
Bearing number	23226CKE4
cage material:	Bronze
Keyword String	Spherical
overall width:	80 mm
Relubricatable	Yes
bore diameter:	130 mm
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Mounting Method	Adapter Mount
Rolling Element	Spherical Roller Bearing
Long Description	130MM Tapered Bore; 230MM Outside Diameter; 80MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part N
Outside Diameter	9.055 Inch 230 Millimeter
Manufacturer URL	http://www.nskamericas.com
outer ring type:	Not Split
Manufacturer Name	NSK
Withdrawal Sleeve	AH3226 (Specify bore)
outside diameter:	230 mm
Weight / Kilogram	14.19
Bore Diameter (mm)	130

Internal Clearance	C0-Medium
Adapter Part Number	SNW126 H2326 HA2326 HE2326 (Specify Bore) Inch H2326 (Specify bore) Millimeter
Outer Diameter (mm)	230
internal clearance:	C0
Minimum Buy Quantity	N/A
Harmonized Tariff Code	84823080
Calculation factor (e)	0,34
lubrication hole type:	Oil Grooves And Holes In Outer Ring
Calculation factor (Y2)	2,9
Calculation factor (Y0)	1,9
(Oil) Lubrication Speed	1600 r/min
Manufacturer Item Number	23226CKE4
Number of Rows of Rollers	Double Row
(Grease) Lubrication Speed	1200 r/min
Basic static load rating (C0)	1080 kN
Basic dynamic load rating (C)	700 kN