


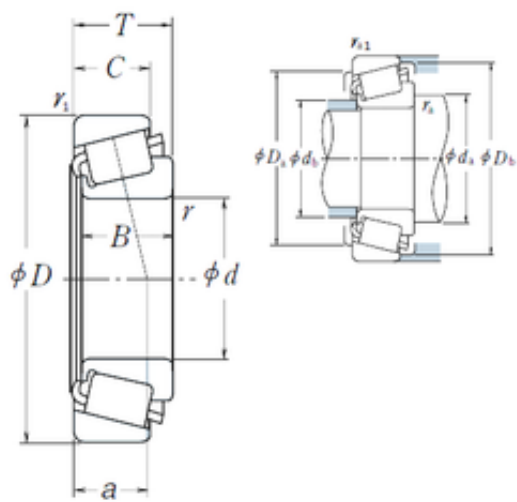

Bearing No. HM88638/HM88610

e	0.55
d	32 mm
D	72,233 mm
T	25,4 mm
B	25,4 mm
C	19,842 mm
a	20,7 mm
Da	60 mm
B_	25.4
Db	69 mm
da	48,5 mm
Y0	0.6
db	42,5 mm
C0	83.5
D_	72.233
Z_	17
C_	19.842
Y1	1.1
DE_	60.342
SLR	19.5
D_a	60
DI_	45.977
DA1	8.245
DA2	6.607
CUP	0.188
DA_	7.43
D_b	60
RAr	97.779
SDM_	53.186
KBRG	3171

yobi	HM88638/HM88610
CONE	0.337
ALP21	40
ALP22	0
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	50
r min.	3,3 mm
LangID	1
Weight	0,525 Kg
ALPHA_	20
r1 min.	2,3 mm
ra max.	3,3 mm
Oil rpm	7100
outer r	2.3
hidYobi	HM88638/HM88610
GRS rpm	5000
inner r	3.3
hidTable	ecat_NSTPRI
inner ra	3.3
outer rb	2.3
ra1 max.	2,3 mm
Size (mm)	32x72.233x25.4
SHOG_yobi	HM88638R/HM88610R
Prod_Type3	TRBSR_ID_A
Width (mm)	25,4
Bearing number	HM88638/HM88610
Bore Diameter (mm)	32
Outer Diameter (mm)	72,233
Calculation factor (e)	0,55

(Oil) Lubrication Speed	7100 r/min
Calculation factor (Y0)	0,6
(Grease) Lubrication Speed	5000 r/min
Basic static load rating (C0)	83,5 kN
Basic dynamic load rating (C)	63,5 kN