


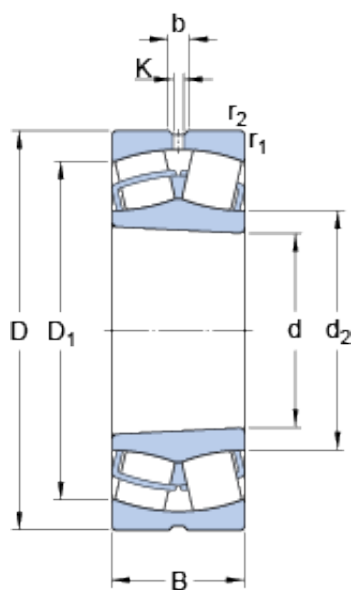

Bearing No. 23226 CCK/W33

D	230 mm
d	130 mm
B	80 mm
b	8.3 mm
K	4.5 mm
Bore	5.118 Inch 130 Millimeter
Noun	Bearing
Width	3.15 Inch 80 Millimeter
UNSPSC	31171510
Category	Spherical Roller Bearing
Inventory	0.0
Size (mm)	230x130x80
Enclosure	Open
Width (mm)	80
Bore Profile	Tapered
Mass bearing	14 kg
Weight / LBS	30.424
Inch - Metric	Metric
Cage Material	Steel
D ₁	196 mm
d ₂	151 mm
Product Group	B04311
Other Features	Order adapter or withdrawal sleeve or nut separately. Others may be available
Withdrawal Nut	KM29
Relubricatable	Yes
Keyword String	Spherical
Bearing number	23226 CCK/W33

Limiting speed	2600 r/min
Mounting Method	Adapter Mount
Reference speed	1900 r/min
Rolling Element	Spherical Roller Bearing
Long Description	130MM Tapered Bore; 230MM Outside Diameter; 80MM Width; C0-Medium Clearance; Adapter Mount; Double Row of Spherical Roller Bearings; Steel Cage Material; Open Enclosure; Relubricatable; Adapter Part N
Outside Diameter	9.055 Inch 230 Millimeter
Manufacturer URL	http://www.skf.com
Weight / Kilogram	13.812
Manufacturer Name	SKF
Withdrawal Sleeve	AH3226 (Specify bore)
r_a max.	2.5 mm
Internal Clearance	C0-Medium
D_a max.	216 mm
Bore Diameter (mm)	230
Adapter Part Number	SNW126 H2326 HA2326 HE2326 (Specify Bore) Inch H2326 (Specify bore) Millimeter
Outer Diameter (mm)	130
$r_{1,2}$ min.	3 mm
Calculation factor e	0.33
d_a - min.	138 mm
d_a - max.	151 mm
r_a - max.	2.5 mm
Minimum Buy Quantity	N/A

D_a - max.	216 mm
d_2 ?	151 mm
D_1 ?	196 mm
Harmonized Tariff Code	84823080
Calculation factor - e	0.33
$r_{1,2}$ - min.	3 mm
Number of Rows of Rollers	Double Row
Basic dynamic load rating C	826 kN
Basic dynamic load rating - C	826 kN
Fatigue load limit P_u	104 kN
Calculation factor Y_1	2
Calculation factor Y_2	3
Calculation factor Y_0	2
Fatigue load limit - P_u	104 kN
Calculation factor - Y_1	2
Calculation factor - Y_2	3
Calculation factor - Y_0	2
Basic static load rating C_0	1060 kN
Basic static load rating - C_0	1060 kN