


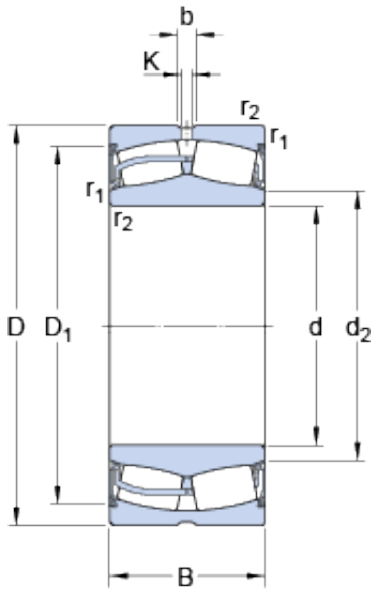

Bearing No. 23226-2CS5/VT143

|                       |                  |
|-----------------------|------------------|
| D                     | 230 mm           |
| d                     | 130 mm           |
| B                     | 80 mm            |
| b                     | 8.3 mm           |
| K                     | 4.5 mm           |
| Category              | Roller Bearings  |
| Inventory             | 0.0              |
| Size (mm)             | 230x130x80       |
| Width (mm)            | 80               |
| Mass bearing          | 14.5 kg          |
| Product Group         | B04311           |
| d <sub>2</sub>        | 147 mm           |
| D <sub>1</sub>        | 209 mm           |
| Limiting speed        | 530 r/min        |
| Bearing number        | 23226-2CS5/VT143 |
| Manufacturer Name     | SKF              |
| Weight / Kilogram     | 14.193           |
| Bore Diameter (mm)    | 230              |
| r <sub>a</sub> max.   | 2.5 mm           |
| D <sub>a</sub> max.   | 216 mm           |
| d <sub>a</sub> max.   | 147 mm           |
| d <sub>a</sub> min.   | 144 mm           |
| Outer Diameter (mm)   | 130              |
| Calculation factor e  | 0.31             |
| r <sub>1,2</sub> min. | 3 mm             |
| r <sub>a</sub> - max. | 2.5 mm           |
| Minimum Buy Quantity  | N/A              |
| D <sub>a</sub> - max. | 216 mm           |
| d <sub>a</sub> - min. | 144 mm           |
| d <sub>a</sub> - max. | 147 mm           |

|                                  |         |
|----------------------------------|---------|
| $d_2$ ?                          | 147 mm  |
| $D_1$ ?                          | 209 mm  |
| $r_{1,2}$ - min.                 | 3 mm    |
| Calculation factor - e           | 0.31    |
| Basic dynamic load rating C      | 828 kN  |
| Basic dynamic load rating - C    | 828 kN  |
| Fatigue load limit $P_u$         | 104 kN  |
| Calculation factor $Y_0$         | 2.2     |
| Calculation factor $Y_2$         | 3.3     |
| Calculation factor $Y_1$         | 2.2     |
| Calculation factor - $Y_2$       | 3.3     |
| Fatigue load limit - $P_u$       | 104 kN  |
| Calculation factor - $Y_0$       | 2.2     |
| Calculation factor - $Y_1$       | 2.2     |
| Basic static load rating $C_0$   | 1060 kN |
| Basic static load rating - $C_0$ | 1060 kN |