


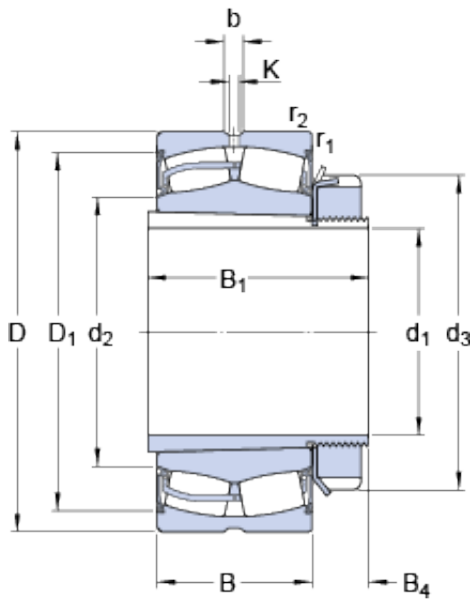

Bearing No. 23226-2CS5K/VT143 + H 2326 L

|                       |                                 |
|-----------------------|---------------------------------|
| K                     | 4.5 mm                          |
| b                     | 8.3 mm                          |
| D                     | 230 mm                          |
| B                     | 80 mm                           |
| Size (mm)             | 230x115x80                      |
| Width (mm)            | 80                              |
| d <sub>1</sub>        | 115 mm                          |
| B <sub>1</sub>        | 121 mm                          |
| d <sub>3</sub>        | 155 mm                          |
| B <sub>4</sub>        | 23 mm                           |
| d <sub>2</sub>        | 147 mm                          |
| D <sub>1</sub>        | 209 mm                          |
| d <sub>3</sub>        | 155 mm                          |
| d <sub>1</sub>        | 115 mm                          |
| B <sub>1</sub>        | 121 mm                          |
| B <sub>4</sub>        | 23 mm                           |
| Bearing number        | 23226-2CS5K/VT143 +<br>H 2326 L |
| Limiting speed        | 530 r/min                       |
| Bore Diameter (mm)    | 230                             |
| r <sub>a</sub> max.   | 2.5 mm                          |
| B <sub>a</sub> min.   | 21 mm                           |
| D <sub>a</sub> max.   | 216 mm                          |
| d <sub>b</sub> min.   | 142 mm                          |
| d <sub>a</sub> max.   | 147 mm                          |
| Outer Diameter (mm)   | 115                             |
| Calculation factor e  | 0.31                            |
| r <sub>1,2</sub> min. | 3 mm                            |
| B <sub>a</sub> - min. | 21 mm                           |
|                       |                                 |

|                                  |         |
|----------------------------------|---------|
| $D_a$ - max.                     | 216 mm  |
| $r_a$ - max.                     | 2.5 mm  |
| $d_b$ - min.                     | 142 mm  |
| $d_a$ - max.                     | 147 mm  |
| $d_2$ ?                          | 147 mm  |
| Mass bearing + sleeve            | 18.2 kg |
| $D_1$ ?                          | 209 mm  |
| Calculation factor - e           | 0.31    |
| $r_{1,2}$ - min.                 | 3 mm    |
| Basic dynamic load rating C      | 828 kN  |
| Basic dynamic load rating - C    | 828 kN  |
| Fatigue load limit $P_u$         | 104 kN  |
| Calculation factor $Y_1$         | 2.2     |
| Calculation factor $Y_2$         | 3.3     |
| Calculation factor $Y_0$         | 2.2     |
| Calculation factor - $Y_1$       | 2.2     |
| Calculation factor - $Y_2$       | 3.3     |
| Fatigue load limit - $P_u$       | 104 kN  |
| Basic static load rating $C_0$   | 1060 kN |
| Basic static load rating - $C_0$ | 1060 kN |