


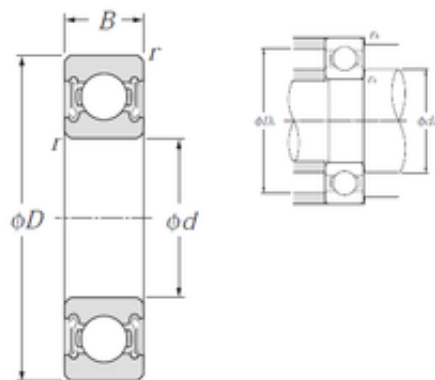

Bearing No. 6011LLB

C	18 mm
d	55 mm
D	90 mm
B	18 mm
Bore	2.165 Inch 55 Millimeter
Noun	Bearing
Weight	0,388 Kg
r min.	1,1 mm
da max	64 mm
UNSPSC	31171504
da min.	61,5 mm
Da max.	83,5 mm
ra max.	1 mm
Category	Single Row Ball Bearing
Size (mm)	55x90x18
Snap Ring	No
Inventory	0.0
Enclosure	2 Seals
Width (mm)	18
bore type:	Round
Weight / LBS	0.85539
Inch - Metric	Metric
closure type:	Double Sealed
Product Group	B00308
Cage Material	Steel
bore diameter:	55 mm
Keyword String	Ball
overall width:	18 mm
cage material:	Steel

fillet radius:	1.1 mm
Other Features	Deep Groove Non-Friction Nitrile Rubber Seal Shell Alvania Prelubricated
Bearing number	6011LLB
Enclosure Type	Non-Contact Seal
finish/coating:	Uncoated
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Outside Diameter	3.543 Inch 90 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer Name	NTN
precision rating:	ISO Class 0
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0
inner ring width:	18 mm
outer ring width:	18 mm
outside diameter:	90 mm
Bore Diameter (mm)	55
Internal Clearance	C0-Medium

snap ring included:	Without Snap Ring
Outer Diameter (mm)	90
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	21200 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	7700 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	28300 N
Internal Special Features	No
(Grease) Lubrication Speed	7 700 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	21,2 kN
Basic dynamic load rating (C)	28,3 kN
Maximum Capacity / Filling Slot	No