


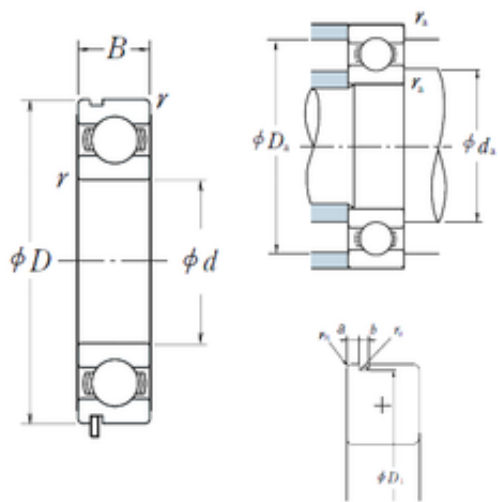

Bearing No. 6011N

a	2,87 mm
r	1.1
d	55 mm
D	90 mm
B	18 mm
C	18 mm
b	2,7 mm
fo	15.3
B_	18
ra	1
C0	21.2
D1	86,79 mm
D_	90
Z_	13
rn	0,5 mm
ro	0.6
DE_	82.819
SRI	5.34
D_a	83.5
DA_	10.319
SRE	5.34
DI_	62.181
yobi	6011N
mass	0.381
SBRG	10
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	72.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	28300
da max	64 mm
da min	61.5
Weight	0,381 Kg
LangID	1
ra max.	1 mm
Da max.	83,5 mm
Oil rpm	9000
da min.	61,5 mm
r0 max.	0,6 mm
hidYobi	6011N
GRS rpm	7500
hidTable	ecat_NSRDGB
Size (mm)	55x90x18
Prod_Type3	DGBB_SR_N_OT
Width (mm)	18
Bearing number	6011N
Bore Diameter (mm)	55
Outer Diameter (mm)	90
(Oil) Lubrication Speed	9 000 r/min
(Grease) Lubrication Speed	7 500 r/min
Basic dynamic load rating (C)	28,3 kN
Basic static load rating (C0)	21,2 kN