


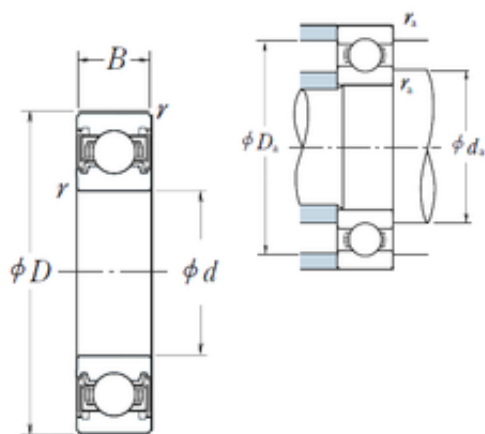

Bearing No. 6011VV

D	90 mm
d	55 mm
B	18 mm
C	18 mm
r	1.1
Z_	13
B_	18
D_	90
ra	1
C0	21.2
fo	15.3
DI_	62.181
SRI	5.34
D_a	83.5
DE_	82.819
DA_	10.319
SRE	5.34
SRIN	-0.025
SBRG	10
yobi	6011VV
SDM_	72.5
SREX	0.025
KBRG	6151
bomp	0
mass	0.381
Bore	2.165 Inch 55 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	61.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	64 mm
C_conv	28300
Weight	0,381 Kg
ra max.	1 mm
hidYobi	6011VV
GRS rpm	7500
da min.	61,5 mm
Da max.	83,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	55x90x18
Enclosure	2 Seals
Inventory	0.0
Width (mm)	18
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.376
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6011VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	3.543 Inch 90 Millimeter
Outer Race Width	0.709 Inch 18

	Millimeter
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.38
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	55
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6011VV
Internal Special Features	No
(Grease) Lubrication Speed	7 500 r/min
Basic static load rating (C0)	21,2 kN
Basic dynamic load rating (C)	28,3 kN
Maximum Capacity / Filling Slot	No