


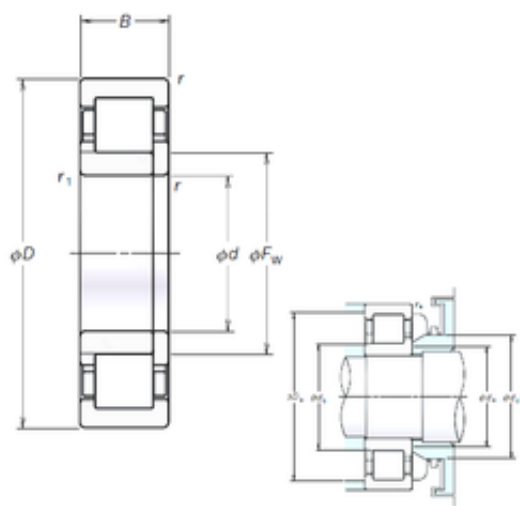

Bearing No. NUP216EM

r	2
D	140 mm
C	26 mm
S	1,4 mm
B	26 mm
d	80 mm
Fw	95,3 mm
Z_	18
r1	2
da	89
C0	167
ra	2
rb	2
B_	26
D_	140
DA_	16
DE_	127.3
DI_	95.3
yobi	NUP216EM
mass	1.77
SDM_	111.3
KBRG	4165
SBRG	2
db min	89 mm
C_conv	139000
Db max	131 mm
r min.	2 mm
ALPHA_	0
LangID	1
dd min	104

dc min	97
Weight	1,7 Kg
db max	93
da min.	89 mm
D_a max	131
r1 min.	2 mm
rb max.	2 mm
TSR rpm	5000
Da max.	131 mm
GRS rpm	4500
Oil rpm	5300
ra max.	2 mm
hidYobi	NUP216EM
db max.	92 mm
hidTable	ecat_NSCLDR
Macha rpm	8000
Size (mm)	80x140x26
Prod_Type3	CRB_SR_NUP
Width (mm)	26
Bearing number	NUP216EM
Bore Diameter (mm)	80
Outer Diameter (mm)	140
(Grease) Lubrication Speed	4500 r/min
Basic static load rating (C0)	167 kN
Basic dynamic load rating (C)	139 kN