


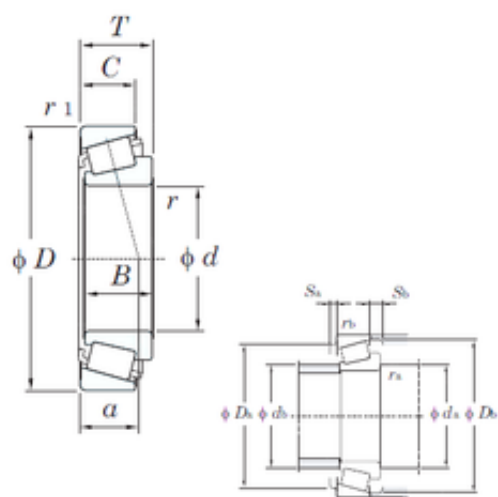

Bearing No. 30313DJR

D	140 mm
d	65 mm
T	36 mm
B	33 mm
C	23 mm
a	44,3 mm
e	0.83
Cr	220
Cu	31.4
Y0	0.40
Y1	0.73
C0r	209
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
a(mm)	44.3
Da min	111 mm
da max	79 mm
Weight	2,44 Kg
r min.	3 mm
r(min)	3
UNSPSC	31171516
Db(min)	133
db(max)	79
Da(max)	128
Da(min)	111
r1(min)	2.5
Sa(min)	4
Sb(min)	13
ra(max)	2.5

rb(max)	2
da(min)	79
ra max.	2,5 mm
Db min.	133 mm
Da max.	128 mm
da min.	79 mm
r2 min.	2,5 mm
rb max.	2 mm
Oil lub.	3400
Category	Tapered Roller Bearings Assembly
Size (mm)	65x140x36
Component	Assembly
Inventory	0.0
Width (mm)	36
Grease lub.	2400
Bearing No.	30313DJR
Basic Number	30313
Weight / LBS	5.379
Inch - Metric	Metric
Product Group	B04334
Other Features	High Load Capacity Steep Contact Angle
Keyword String	Tapered
Assembly Width	1.417 Inch 36 Millimeter
Bearing number	30313DJR
Precision Class	Standard
(Refer.)Mass(kg)	2.44
Outside Diameter	5.512 Inch 140 Millimeter
Manufacturer URL	http://www.koyousa.com
Long Description	Assembly; Standard Precision; 65MM Bore;

	140MM Outside Diameter; 36MM Assembly Width; Single Row of Rollers
Weight / Kilogram	2.628
Manufacturer Name	KOYO
Bore Diameter (mm)	65
Outer Diameter (mm)	140
Minimum Buy Quantity	N/A
Calculation factor (e)	0,83
Number of Tapered Rows	Single Row
Harmonized Tariff Code	8482.20.00.00
Flange Outside Diameter	0 Inch 0 Millimeter
(Oil) Lubrication Speed	3400 r/min
Calculation factor (Y0)	0,4
Manufacturer Item Number	30313DJR
(Grease) Lubrication Speed	2400 r/min
Basic static load rating (C0)	209 kN
Basic dynamic load rating (C)	176 kN