


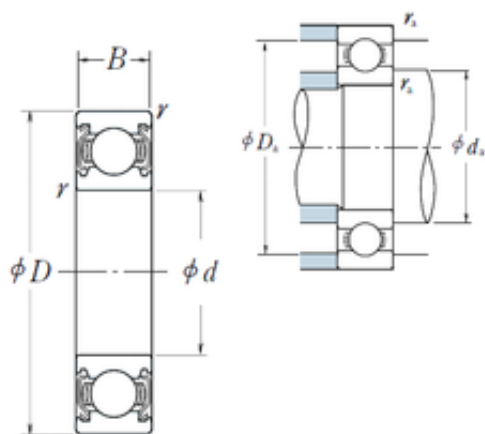

Bearing No. 6011ZZ

r	1.1
d	55 mm
D	90 mm
B	18 mm
C	18 mm
fo	15.3
D_	90
B_	18
ra	1
Z_	13
C0	21.2
DI_	62.181
SRE	5.34
D_a	83.5
DE_	82.819
SRI	5.34
DA_	10.319
SREN	-0.025
Noun	Bearing
SRIN	-0.025
bomp	0
SRIX	0.025
yobi	6011ZZ
mass	0.381
SDM_	72.5
KBRG	6141
SREX	0.025
SBRG	10
Bore	2.165 Inch 55 Millimeter

da max	64 mm
LangID	1
r min.	1,1 mm
UNSPSC	31171504
ALPHA_	0
Weight	0,381 Kg
da min	61.5
C_conv	28300
Da max.	83,5 mm
hidYobi	6011ZZ
ra max.	1 mm
GRS rpm	7500
da min.	61,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	55x90x18
Enclosure	2 Metal Shields
Snap Ring	No
Inventory	0.0
Prod_Type3	DGBB_SR_ZZ
bore type:	Round
Width (mm)	18
Weight / LBS	0.385
Cage Material	Steel
Product Group	B00308
closure type:	Double Shielded
Inch - Metric	Metric
Bearing number	6011ZZ
overall width:	18 mm
Keyword String	Ball
bore diameter:	55 mm
Precision Class	ABEC 1 ISO P0

Rolling Element	Ball Bearing
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	55MM Bore; 90MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.543 Inch 90 Millimeter
Weight / Kilogram	0.385
outside diameter:	90 mm
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	55
internal clearance:	Normal Clearance
snap ring included:	Without Snap Ring
Outer Diameter (mm)	90
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
manufacturer upc number:	029176013096
Manufacturer Item Number	6011ZZ
Internal Special Features	No
(Grease) Lubrication Speed	7 500 r/min
Basic static load rating (C0)	21,2 kN
Basic dynamic load	28,3 kN

rating (C)	
Maximum Capacity / Filling Slot	No