


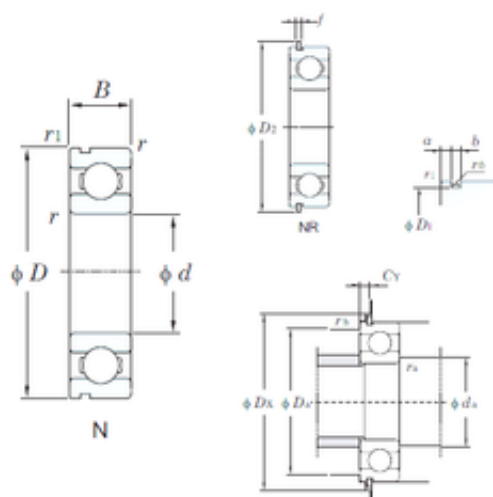

Bearing No. 6012NR

f	2,41 mm
d	60 mm
D	95 mm
B	18 mm
C	18 mm
a	2,87 mm
b	2,85 mm
Cr	36.8
f0	15.6
Cu	1.35
D2	101,6 mm
D1	91,82 mm
C0r	23.2
Bore	2.362 Inch 60 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,415 Kg
r1(min)	0.5
da(min)	66.5
D2(min)	101.6
Da(max)	88.5
rb(max)	0.5
ra(max)	1
Dx(min)	103
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	66,5 mm

Cy(max)	5.03
Da max.	88,5 mm
Category	Single Row Ball Bearing
Oil lub.	8400
Snap Ring	Yes
Size (mm)	60x95x18
Inventory	0.0
Enclosure	Open
Width (mm)	18
Grease lub.	7100
f{0.05)	2.41
Bearing No.	6012NR
Weight / LBS	0.91492
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6012NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0 Inch 0 Millimeter
(Refer.)Mass(kg)	0.415
Long Description	60MM Bore; 95MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outside Diameter	3.74 Inch 95 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Weight / Kilogram	0
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	8400 r/min
Internal Special Features	No
(Grease) Lubrication Speed	7100 r/min
Basic static load rating (C0)	23,2 kN
Basic dynamic load rating (C)	29,4 kN
Maximum Capacity / Filling Slot	No