


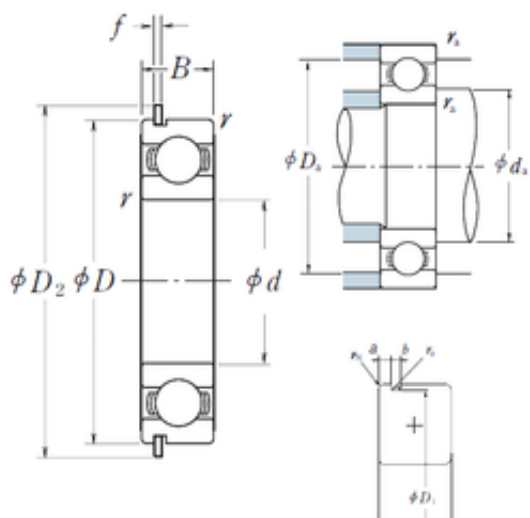

Bearing No. 6012NR

f	2,46 mm
r	1.1
d	60 mm
D	95 mm
B	18 mm
C	18 mm
a	2,87 mm
b	2,7 mm
D1	91,82 mm
fo	15.6
C0	23.2
ra	1
D2	101,6 mm
Cy	5
ro	0.6
Dx	103
rn	0,5 mm
D_	95
B_	18
Z_	14
SRI	5.34
D_a	88.5
DE_	87.819
SRE	5.34
DA_	10.319
DI_	67.181
Noun	Bearing
SDM_	77.5
Bore	2.362 Inch 60 Millimeter

SRIX	0.025
SRIN	-0.025
SREX	0.025
SREN	-0.025
KBRG	6101
bomp	0
mass	0.412
yobi	6012NR
SBRG	10
da min	66.5
Weight	0,412 Kg
UNSPSC	31171504
r min.	1,1 mm
ALPHA_	0
da max	69 mm
LangID	1
C_conv	29500
hidYobi	6012NR
ra max.	1 mm
Da max.	88,5 mm
Oil rpm	8500
da min.	66,5 mm
GRS rpm	7100
r0 max.	0,6 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	60x95x18
Snap Ring	Yes
Enclosure	Open
Width (mm)	18
Prod_Type3	DGBB_SR_NR_OT

Weight / LBS	0.9085
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
Bearing number	6012NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Inner Race Width	0 Inch 0 Millimeter
Outside Diameter	3.74 Inch 95 Millimeter
Long Description	60MM Bore; 95MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.709 Inch 18 Millimeter
Weight / Kilogram	0.415
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	8 500 r/min
Internal Special Features	No

(Grease) Lubrication Speed	7 100 r/min
Basic static load rating (C0)	23,2 kN
Basic dynamic load rating (C)	29,5 kN
Maximum Capacity / Filling Slot	No