


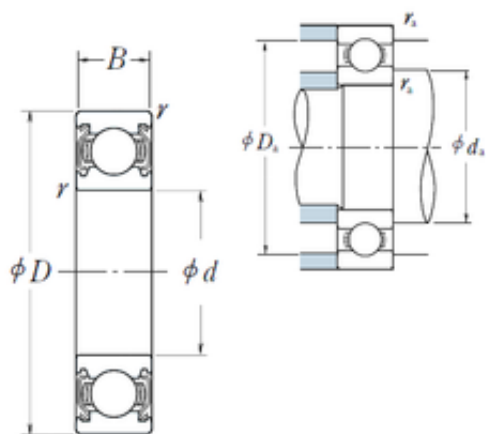

Bearing No. 6012ZZ

r	1.1
d	60 mm
D	95 mm
B	18 mm
C	18 mm
Z_	14
B_	18
D_	95
fo	15.6
ra	1
C0	23.2
DI_	67.181
DE_	87.819
DA_	10.319
D_a	88.5
SRI	5.34
SRE	5.34
SRIX	0.025
SRIN	-0.025
Noun	Bearing
bomp	0
SREN	-0.025
SREX	0.025
Bore	2.362 Inch 60 Millimeter
mass	0.412
KBRG	6141
SBRG	10
yobi	6012ZZ
SDM_	77.5

Weight	0,412 Kg
LangID	1
r min.	1,1 mm
ALPHA_	0
UNSPSC	31171504
da min	66.5
C_conv	29500
da max	69 mm
da min.	66,5 mm
GRS rpm	7100
hidYobi	6012ZZ
ra max.	1 mm
Da max.	88,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	60x95x18
Inventory	0.0
Snap Ring	No
Width (mm)	18
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.415
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6012ZZ
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.nskamericas.com
Outer Race Width	0.709 Inch 18 Millimeter

Outside Diameter	3.74 Inch 95 Millimeter
Long Description	60MM Bore; 95MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer Name	NSK
Weight / Kilogram	0.41
Internal Clearance	C0-Medium
Bore Diameter (mm)	60
Outer Diameter (mm)	95
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6012ZZ
Internal Special Features	No
(Grease) Lubrication Speed	7 100 r/min
Basic static load rating (C0)	23,2 kN
Basic dynamic load rating (C)	29,5 kN
Maximum Capacity / Filling Slot	No