


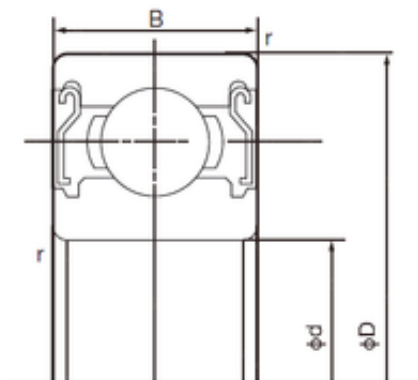

Bearing No. 6012ZZE

D	95 mm
d	60 mm
B	18 mm
C	18 mm
Noun	Bearing
Bore	2.362 Inch 60 Millimeter
Width	18 mm
UNSPSC	31171504
r min.	1.1 mm
Weight	0.418 Kg
da min.	66 mm
Da max.	89 mm
ra max.	1.0 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
Da (max)	89 mm
da (min)	66 mm
Factor fo	15.5
Inventory	0.0
Bore Size	60 mm
Bore Type	Cylindrical Bore
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	60x95x18
Width (mm)	18
Configuration	Single Row
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric

Other Features	Deep Groove
Keyword String	Ball
Bearing number	6012ZZE
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	60MM Bore; 95MM Outside Diameter; 18MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.nachiamerica.com
Outside Diameter	3.74 Inch 95 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Radial Clearance	0.008 to 0.028 mm
Weight / Kilogram	0
Manufacturer Name	NACHI
Bore Diameter (mm)	60
Internal Clearance	C0-Medium
Static Load Rating	23,200 N
Dynamic Load Rating	29,400 N
Outer Diameter (mm)	95
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	7,100 rpm
Internal Special Features	No
Basic dynamic load	29,4 kN

rating (C)	
Basic static load rating (C0)	23,2 kN
Maximum Capacity / Filling Slot	No