


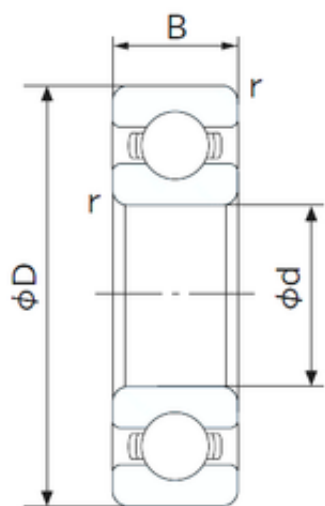

Bearing No. 6013

C	18 mm
d	65 mm
D	100 mm
B	18 mm
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
Width	18 mm
Weight	0.438 Kg
r min.	1.1 mm
UNSPSC	31171504
da min.	71 mm
Da max.	94 mm
ra max.	1.0 mm
da (min)	71 mm
Da (max)	94 mm
Category	Single Row Ball Bearing
ra (max)	1 mm
Bore Type	Cylindrical Bore
Enclosure	Open
Factor fo	15.7
Inventory	0.0
Bore Size	65 mm
Size (mm)	65x100x18
Snap Ring	No
Width (mm)	18
Weight / LBS	1.0048
Configuration	Single Row
Inch - Metric	Metric
Cage Material	Steel

Product Group	B00308
Bearing number	6013
Other Features	Deep Groove
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Radial Clearance	0.008 to 0.028 mm
Outside Diameter	3.937 Inch 100 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Manufacturer URL	http://www.nachiamerica.com
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Manufacturer Name	NACHI
Weight / Kilogram	0
Static Load Rating	25,200 N
Bore Diameter (mm)	65
Internal Clearance	C0-Medium
Outer Diameter (mm)	100
Dynamic Load Rating	30,500 N
Minimum Buy Quantity	N/A
Limiting Speed - Oil	8,000 rpm
Fillet Radius/Chamfer	1.1 mm
Harmonized Tariff Code	8482.10.50.68
Limiting Speed - Grease	6,700 rpm

Internal Special Features	No
(Grease) Lubrication Speed	6500 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No