


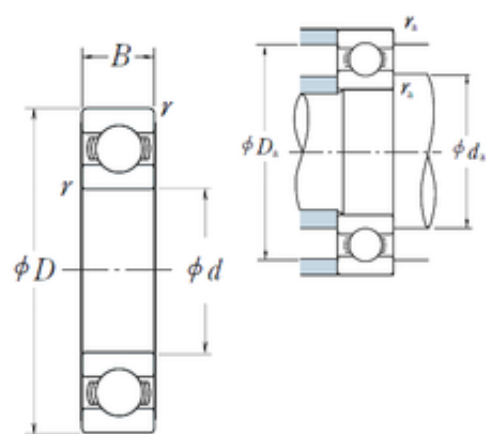

Bearing No. 6013

D	100 mm
d	65 mm
B	18 mm
C	18 mm
r	1.1
Z_	15
D_	100
ra	1
C0	25.2
fo	15.8
B_	18
DI_	72.181
SRI	5.34
SRE	5.34
D_a	93.5
DA_	10.319
DE_	92.819
SREX	0.025
SREN	-0.025
SBRG	10
KBRG	6101
mass	0.439
Bore	2.559 Inch 65 Millimeter
SRIX	0.025
SRIN	-0.025
Noun	Bearing
yobi	6013
SDM_	82.5
bomp	0

Weight	0,439 Kg
C_conv	30500
LangID	1
da min	71.5
r min.	1,1 mm
ALPHA_	0
UNSPSC	31171504
da max	73 mm
GRS rpm	6700
Oil rpm	8000
hidYobi	6013
ra max.	1 mm
Da max.	93,5 mm
da min.	71,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Size (mm)	65x100x18
Inventory	0.0
Enclosure	Open
Snap Ring	No
Prod_Type3	DGBB_SR_OT
Width (mm)	18
bore type:	Round
Weight / LBS	0.434
Product Group	B00308
Cage Material	Steel
Inch - Metric	Metric
closure type:	Open
Bearing number	6013
Keyword String	Ball
overall width:	18 mm
bore diameter:	65 mm

Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Outer Race Width	0.709 Inch 18 Millimeter
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.937 Inch 100 Millimeter
outside diameter:	100 mm
Manufacturer Name	NSK
Weight / Kilogram	0.435
Bore Diameter (mm)	65
Internal Clearance	C0-Medium
internal clearance:	Normal Clearance
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	8 000 r/min
Manufacturer Item Number	6013
manufacturer upc number:	029176013171
Internal Special Features	No
(Grease) Lubrication Speed	6 700 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load	30,5 kN

rating (C)	
Maximum Capacity / Filling Slot	No