


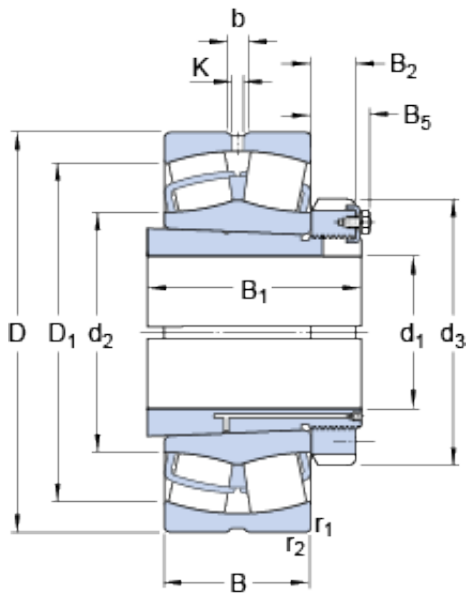

Bearing No. 23056 CCK/W33 + OH 3056 H

K	9 mm
b	16.7 mm
D	420 mm
B	106 mm
Size (mm)	420x260x106
Width (mm)	106
D ₁	380 mm
B ₁	152 mm
B ₅	50 mm
B ₂	38 mm
d ₃	330 mm
B ₁	152 mm
d ₁	260 mm
d ₂	315 mm
d ₁	260 mm
B ₂	38 mm
B ₅	50 mm
d ₃	330 mm
Bearing number	23056 CCK/W33 + OH 3056 H
Limiting speed	1600 r/min
Reference speed	1300 r/min
Bore Diameter (mm)	420
r _a max.	3 mm
B _a min.	12 mm
D _a max.	405 mm
d _b min.	292 mm
d _a max.	315 mm
Outer Diameter (mm)	260

d_a - max.	315 mm
Calculation factor e	0.23
$r_{1,2}$ min.	4 mm
r_a - max.	3 mm
B_a - min.	12 mm
D_a - max.	405 mm
d_b - min.	292 mm
D_1 ?	380 mm
d_2 ?	315 mm
Mass bearing + sleeve	67 kg
Calculation factor - e	0.23
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	1797 kN
Basic dynamic load rating - C	1797 kN
Fatigue load limit P_u	224 kN
Calculation factor Y_1	2.9
Calculation factor Y_2	4.4
Calculation factor Y_0	2.8
Calculation factor - Y_2	4.4
Calculation factor - Y_1	2.9
Fatigue load limit - P_u	224 kN
Basic static load rating C_0	2850 kN
Basic static load rating - C_0	2850 kN