


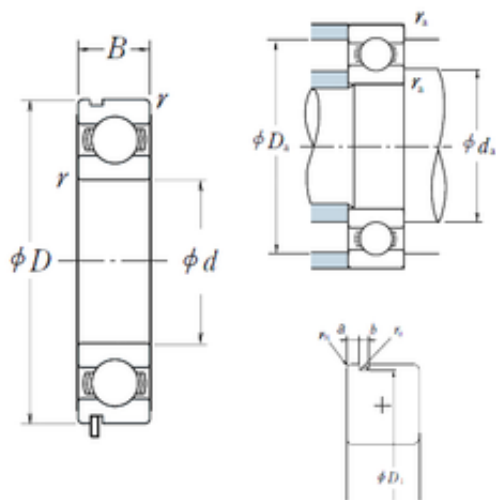

Bearing No. 6013N

a	2,87 mm
r	1.1
d	65 mm
D	100 mm
B	18 mm
C	18 mm
b	2,7 mm
fo	15.8
B_	18
ra	1
C0	25.2
D1	96,8 mm
D_	100
Z_	15
rn	0,5 mm
ro	0.6
DE_	92.819
SRI	5.34
D_a	93.5
DA_	10.319
SRE	5.34
DI_	72.181
yobi	6013N
mass	0.439
SBRG	10
bomp	0
KBRG	6101
SREX	0.025
SREN	-0.025
SRIN	-0.025

SDM_	82.5
SRIX	0.025
ALPHA_	0
r min.	1,1 mm
C_conv	30500
da max	73 mm
da min	71.5
Weight	0,439 Kg
LangID	1
ra max.	1 mm
Da max.	93,5 mm
Oil rpm	8000
da min.	71,5 mm
r0 max.	0,6 mm
hidYobi	6013N
GRS rpm	6700
hidTable	ecat_NSRDGB
Size (mm)	65x100x18
Prod_Type3	DGBB_SR_N_OT
Width (mm)	18
Bearing number	6013N
Bore Diameter (mm)	65
Outer Diameter (mm)	100
(Oil) Lubrication Speed	8 000 r/min
(Grease) Lubrication Speed	6 700 r/min
Basic dynamic load rating (C)	30,5 kN
Basic static load rating (C0)	25,2 kN