


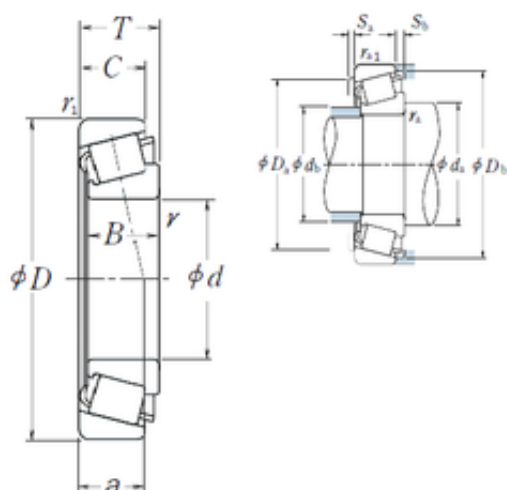

Bearing No. 30330

D	320 mm
d	150 mm
T	72 mm
B	65 mm
C	55 mm
a	61,4 mm
e	0.36
Cr	70000
Y0	0.92
db	193
da	177
Y1	1.7
B_	65
Sb	17
C0	860
Sa	8
D_	320
Z_	14
C_	55
C0r	87500
DA_	41.638
Iso	-
DE_	278.205
D_b	292
DI_	196.795
SBRG	3
SDM_	237.5
D_a2	275
KBRG	3111
yobi	30330

D_a1	302
mass	24.2
TC-RA	618.89
r min.	5 mm
Weight	24,2 Kg
TC-DA1	43.195
TC-DA2	40.081
TC-SLR	45
Da min	275 mm
LangID	1
ALPHA_	13.5
Db min.	292 mm
Oil rpm	1500
db max.	193 mm
Da max.	302 mm
ra max.	4 mm
hidYobi	30330
da min.	177 mm
T-ALP21	27
rb max.	3 mm
T-ALP22	0
T-ALP23	0
GRS rpm	1100
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	150x320x72
Width (mm)	72
Prod_Type3	TRBSR_MD_A
Bearing number	30330
Bore Diameter (mm)	150
Outer Diameter (mm)	320
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
(Oil) Lubrication Speed	1500 r/min
(Grease) Lubrication Speed	1100 r/min
Basic dynamic load rating (C)	690 kN
Basic static load rating (C0)	860 kN