


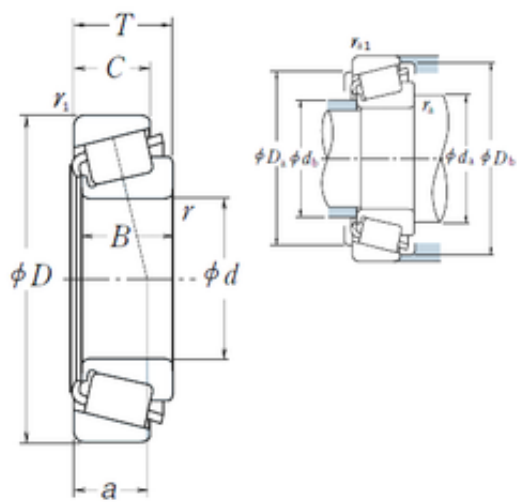

Bearing No. HM801346/HM801310

e	0.55
d	38,1 mm
D	82,55 mm
T	29,37 mm
B	28,575 mm
C	23,02 mm
a	24,2 mm
Da	68 mm
B_	28.575
Db	78 mm
da	51 mm
Y0	0.6
db	49 mm
C0	117
D_	82.55
Z_	18
C_	23.02
Y1	1.1
DE_	69.026
SLR	22
D_a	68
DI_	52.434
DA1	9.64
DA2	7.754
CUP	0.282
DA_	8.702
D_b	78
RAr	112.005
SDM_	60.858
KBRG	3161

yobi	HM801346/HM801310
CONE	0.483
ALP21	40
ALP22	0
ALP23	0
BETA_	2
BET21	4
BET23	0
BET22	56
r min.	0,8 mm
LangID	1
Weight	0,765 Kg
ALPHA_	20
r1 min.	3,3 mm
ra max.	0,8 mm
Oil rpm	6000
outer r	3.3
hidYobi	HM801346/HM801310
GRS rpm	4500
inner r	0.8
hidTable	ecat_NSTPRI
inner ra	0.8
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	38.1x82.55x29.37
SHOG_yobi	HM801346R/HM801310 R
Prod_Type3	TRBSR_ID_A
Width (mm)	29,37
Bearing number	HM801346/HM801310
Bore Diameter (mm)	38,1
Outer Diameter (mm)	82,55
Calculation factor (e)	0,55

(Oil) Lubrication Speed	6000 r/min
Calculation factor (Y0)	0,6
(Grease) Lubrication Speed	4500 r/min
Basic static load rating (C0)	117 kN
Basic dynamic load rating (C)	87 kN