


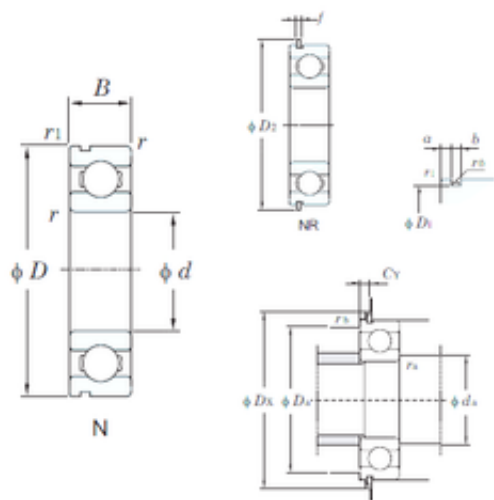

Bearing No. 6013NR

f	2,41 mm
d	65 mm
D	100 mm
B	18 mm
C	18 mm
a	2,87 mm
b	2,85 mm
Cr	38.1
f0	15.8
Cu	1.40
D2	106,5 mm
D1	96,8 mm
C0r	25.2
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,435 Kg
r1(min)	0.5
da(min)	71.5
D2(min)	106.5
Da(max)	93.5
rb(max)	0.5
ra(max)	1
Dx(min)	108
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	71,5 mm

Cy(max)	5.03
Da max.	93,5 mm
Category	Single Row Ball Bearing
Oil lub.	7800
Snap Ring	Yes
Size (mm)	65x100x18
Inventory	0.0
Enclosure	Open
Width (mm)	18
Grease lub.	6600
f{0.05)	2.41
Bearing No.	6013NR
Weight / LBS	0.95901
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6013NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0 Inch 0 Millimeter
(Refer.)Mass(kg)	0.435
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outside Diameter	3.937 Inch 100 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Weight / Kilogram	0.489
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	7800 r/min
Internal Special Features	No
(Grease) Lubrication Speed	6600 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No