


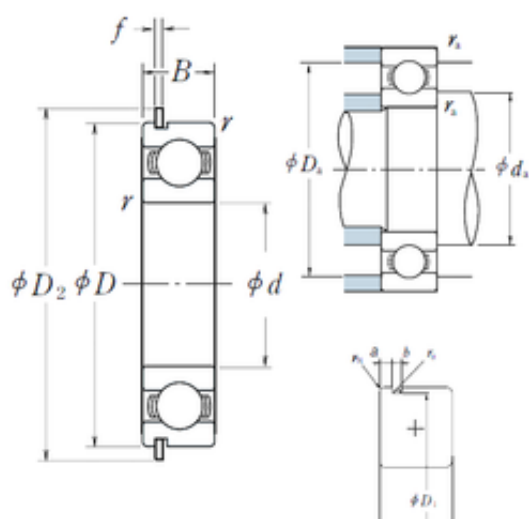

Bearing No. 6013NR

f	2,46 mm
r	1.1
d	65 mm
D	100 mm
B	18 mm
C	18 mm
a	2,87 mm
b	2,7 mm
D1	96,8 mm
fo	15.8
C0	25.2
ra	1
D2	106,5 mm
Z_	15
Cy	5
Dx	108
rn	0,5 mm
B_	18
D_	100
ro	0.6
SRE	5.34
D_a	93.5
DE_	92.819
SRI	5.34
DI_	72.181
DA_	10.319
SRIX	0.025
SBRG	10
mass	0.439
SRIN	-0.025

Noun	Bearing
SREN	-0.025
KBRG	6101
SREX	0.025
SDM_	82.5
bomp	0
yobi	6013NR
Bore	2.559 Inch 65 Millimeter
LangID	1
Weight	0,439 Kg
da min	71.5
UNSPSC	31171504
r min.	1,1 mm
ALPHA_	0
da max	73 mm
C_conv	30500
GRS rpm	6700
series:	60
Oil rpm	8000
r0 max.	0,6 mm
hidYobi	6013NR
da min.	71,5 mm
Da max.	93,5 mm
ra max.	1 mm
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Size (mm)	65x100x18
Snap Ring	Yes
Enclosure	Open
bore type:	Round
Width (mm)	18

Prod_Type3	DGBB_SR_NR_OT
Weight / LBS	0.435
maximum rpm:	8000 RPM
Inch - Metric	Metric
Cage Material	Steel
Product Group	B00308
closure type:	Open
Bearing number	6013NR
bore diameter:	65 mm
fillet radius:	1.1 mm
cage material:	Steel
overall width:	18 mm
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.937 Inch 100 Millimeter
outside diameter:	100 mm
precision rating:	Not Rated
outer ring width:	18 mm
Manufacturer Name	NSK
Weight / Kilogram	0.43

Bore Diameter (mm)	65
Internal Clearance	C0-Medium
internal clearance:	C0
Outer Diameter (mm)	100
snap ring included:	With Snap Ring
Minimum Buy Quantity	N/A
static load capacity:	25200 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	30500 N
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	8 000 r/min
Manufacturer Item Number	6013NR
Internal Special Features	No
(Grease) Lubrication Speed	6 700 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No