


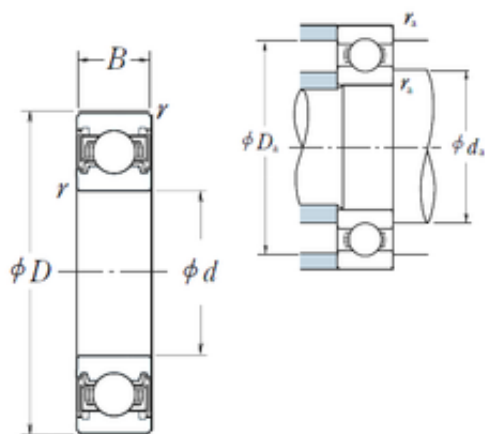

Bearing No. 6013VV

D	100 mm
d	65 mm
B	18 mm
C	18 mm
r	1.1
Z_	15
B_	18
D_	100
ra	1
C0	25.2
fo	15.8
DI_	72.181
SRI	5.34
D_a	93.5
DE_	92.819
DA_	10.319
SRE	5.34
SRIN	-0.025
SBRG	10
yobi	6013VV
SDM_	82.5
SREX	0.025
KBRG	6151
bomp	0
mass	0.439
Bore	2.559 Inch 65 Millimeter
SRIX	0.025
SREN	-0.025
Noun	Bearing

ALPHA_	0
da min	71.5
LangID	1
r min.	1,1 mm
UNSPSC	31171504
da max	73 mm
C_conv	30500
Weight	0,439 Kg
ra max.	1 mm
hidYobi	6013VV
GRS rpm	6700
da min.	71,5 mm
Da max.	93,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Snap Ring	No
Size (mm)	65x100x18
Enclosure	2 Seals
Inventory	0.0
Width (mm)	18
Prod_Type3	DGBB_SR_VV
Weight / LBS	0.427
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	6013VV
Keyword String	Ball
Enclosure Type	Non-Contact Seal
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	3.937 Inch 100 Millimeter
Outer Race Width	0.709 Inch 18

	Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.nskamericas.com
Weight / Kilogram	0.43
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6013VV
Internal Special Features	No
(Grease) Lubrication Speed	6 700 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No