


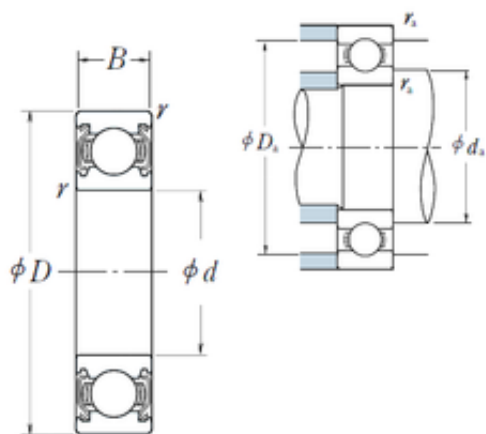

Bearing No. 6013ZZ

r	1.1
d	65 mm
D	100 mm
B	18 mm
C	18 mm
Z_	15
B_	18
D_	100
fo	15.8
ra	1
C0	25.2
DI_	72.181
DE_	92.819
DA_	10.319
D_a	93.5
SRI	5.34
SRE	5.34
SRIX	0.025
SRIN	-0.025
Noun	Bearing
bomp	0
SREN	-0.025
SREX	0.025
Bore	2.559 Inch 65 Millimeter
mass	0.439
KBRG	6141
SBRG	10
yobi	6013ZZ
SDM_	82.5

Weight	0,439 Kg
LangID	1
r min.	1,1 mm
ALPHA_	0
UNSPSC	31171504
da min	71.5
C_conv	30500
da max	73 mm
da min.	71,5 mm
GRS rpm	6700
hidYobi	6013ZZ
ra max.	1 mm
Da max.	93,5 mm
Category	Single Row Ball Bearing
hidTable	ecat_NSRDGB
Enclosure	2 Metal Shields
Size (mm)	65x100x18
Inventory	0.0
Snap Ring	No
Width (mm)	18
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.435
Product Group	B00308
Inch - Metric	Metric
Cage Material	Steel
Bearing number	6013ZZ
Keyword String	Ball
Rolling Element	Ball Bearing
Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	3.937 Inch 100 Millimeter

Outer Race Width	0.709 Inch 18 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer Name	NSK
Weight / Kilogram	0.44
Internal Clearance	C0-Medium
Bore Diameter (mm)	65
Outer Diameter (mm)	100
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	6013ZZ
Internal Special Features	No
(Grease) Lubrication Speed	6 700 r/min
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No