


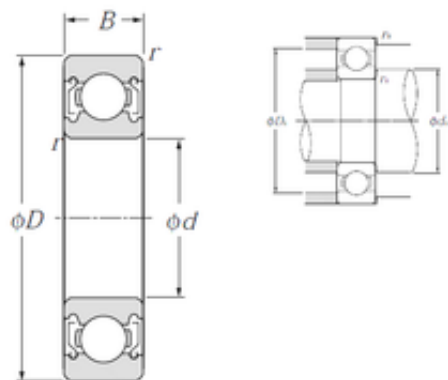

Bearing No. 6013ZZ

D	100 mm
d	65 mm
B	18 mm
C	18 mm
rn	0,5 mm
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
da max	74 mm
UNSPSC	31171504
Weight	0,421 Kg
r min.	1,1 mm
ra max.	1 mm
da min.	71,5 mm
Da max.	93,5 mm
Category	Single Row Ball Bearing
Size (mm)	65x100x18
Snap Ring	No
Inventory	0.0
Enclosure	2 Metal Shields
Width (mm)	18
bore type:	Round
Weight / LBS	1.0542
Inch - Metric	Metric
closure type:	Double Shielded
Product Group	B00308
Cage Material	Steel
bore diameter:	65 mm
Keyword String	Ball
overall width:	18 mm

cage material:	Steel
fillet radius:	1.1 mm
Other Features	Deep Groove Shell Alvania Prelubricated
Bearing number	6013ZZ
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste
Manufacturer URL	http://www.ntnamerica.com
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	0.709 Inch 18 Millimeter
Outside Diameter	3.937 Inch 100 Millimeter
precision rating:	ISO Class 0
outer ring width:	18 mm
inner ring width:	18 mm
Weight / Kilogram	0
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	100 mm
Bore Diameter (mm)	65
Internal Clearance	C0-Medium
snap ring included:	Without Snap Ring

Outer Diameter (mm)	100
internal clearance:	CN
Minimum Buy Quantity	N/A
static load capacity:	25200 N
row type & fill slot:	Single Row Non-Fill Slot
maximum rpm (grease):	6500 rpm
Harmonized Tariff Code	8482.10.50.68
dynamic load capacity:	30500 N
Internal Special Features	No
(Grease) Lubrication Speed	6 500 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic static load rating (C0)	25,2 kN
Basic dynamic load rating (C)	30,5 kN
Maximum Capacity / Filling Slot	No