


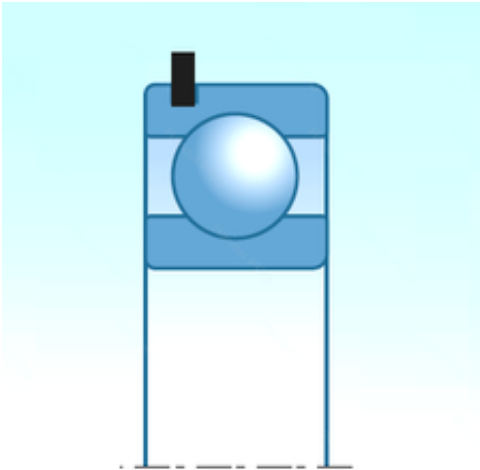

Bearing No. 6013ZZNR

D	100,000 mm
C	18,000 mm
B	18,000 mm
d	65,000 mm
Bore	2.559 Inch 65 Millimeter
Noun	Bearing
UNSPSC	31171504
series:	60
Category	Single Row Ball Bearing
Size (mm)	65x100x18
Enclosure	2 Metal Shields
Snap Ring	Yes
Inventory	0.0
Width (mm)	18,000
bore type:	Round
maximum rpm:	7700 RPM
Weight / LBS	0.959
Cage Material	Steel
closure type:	Double Shielded
Product Group	B00308
Inch - Metric	Metric
Bearing number	6013ZZNR
bore diameter:	65 mm
overall width:	18 mm
fillet radius:	1.1 mm
cage material:	Steel
Keyword String	Ball
Rolling Element	Ball Bearing
finish/coating:	Uncoated

Precision Class	ABEC 1 ISO P0
Manufacturer URL	http://www.ntnamerica.com
Outer Race Width	0.709 Inch 18 Millimeter
Long Description	65MM Bore; 100MM Outside Diameter; 18MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features
Outside Diameter	3.937 Inch 100 Millimeter
Weight / Kilogram	0.455
outer ring width:	18 mm
inner ring width:	18 mm
bearing material:	High Carbon Chrome Steel
Manufacturer Name	NTN
outside diameter:	100 mm
precision rating:	ISO Class 0
Bore Diameter (mm)	65,000
Internal Clearance	C0-Medium
Outer Diameter (mm)	100,000
snap ring included:	With Snap Ring
internal clearance:	CN
Minimum Buy Quantity	N/A
row type & fill slot:	Single Row Non-Fill Slot
static load capacity:	25200 N
maximum rpm (grease):	6500 rpm
dynamic load capacity:	30500 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item	6013ZZNR/2A

Number	
Internal Special Features	No
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Maximum Capacity / Filling Slot	No