


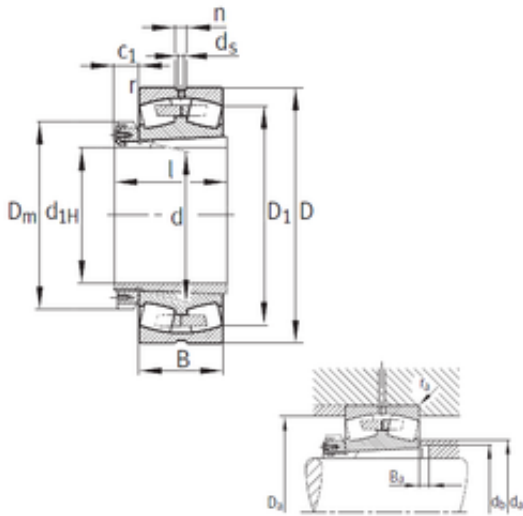

Bearing No. 23064-K-MB+H3064

|                         |                  |
|-------------------------|------------------|
| C                       | 121 mm           |
| l                       | 171 mm           |
| n                       | 17,7 mm          |
| d                       | 320 mm           |
| D                       | 480 mm           |
| B                       | 121 mm           |
| D1                      | 432,6 mm         |
| C1                      | 56 mm            |
| d5                      | 9,5 r/min        |
| Dm                      | 380 mm           |
| d1                      | 300 mm           |
| Weight                  | 102,2 Kg         |
| r min.                  | 4 mm             |
| da max                  | 357 mm           |
| db min                  | 334 mm           |
| ba min.                 | 13 mm            |
| Da max.                 | 465,4 mm         |
| ra max.                 | 3 mm             |
| Size (mm)               | 320x480x121      |
| Width (mm)              | 121              |
| Limiting speed          | 1 100 r/min      |
| Bearing number          | 23064-K-MB+H3064 |
| Reference speed         | 900 r/min        |
| Bore Diameter (mm)      | 320              |
| Outer Diameter (mm)     | 480              |
| Calculation factor (e)  | 0,25             |
| Fatigue load limit (Pu) | 243              |
| Calculation factor (Y0) | 2,68             |
| Calculation factor (Y1) | 2,74             |
| Basic dynamic load      | 2040 kN          |

|                               |         |
|-------------------------------|---------|
| rating (C)                    |         |
| Basic static load rating (C0) | 4000 kN |