


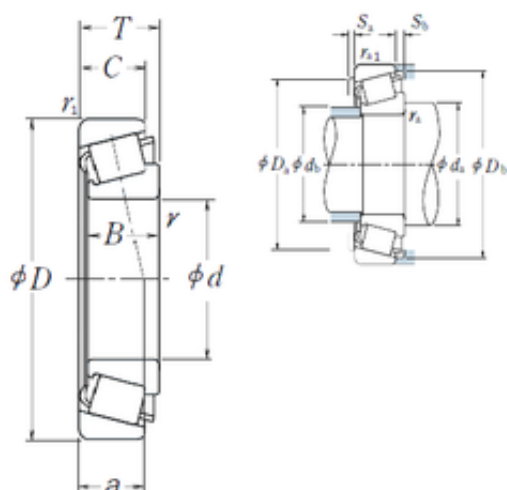

Bearing No. 30334

D	360 mm
d	170 mm
T	80 mm
B	72 mm
C	62 mm
a	70,1 mm
e	0.37
Cr	86000
Y0	0.9
db	221
da	197
Y1	1.6
B_	72
Sb	18
C0	1080
Sa	10
D_	360
Z_	14
C_	62
C0r	110000
DA_	46.502
Iso	-
DE_	316.427
D_b	332
DI_	225.522
SBRG	3
SDM_	270.975
D_a2	312
KBRG	3111
yobi	30334

D_a1	342
mass	33.5
TC-RA	691.046
r min.	5 mm
Weight	33,5 Kg
TC-DA1	48.231
TC-DA2	44.772
TC-SLR	50
Da min	312 mm
LangID	1
ALPHA_	13.75
Db min.	332 mm
Oil rpm	1300
db max.	221 mm
Da max.	342 mm
ra max.	4 mm
hidYobi	30334
da min.	197 mm
T-ALP21	27
rb max.	3 mm
T-ALP22	30
T-ALP23	0
GRS rpm	950
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	4
inner ra	4
outer rb	3
TC-BET22	0

Size (mm)	170x360x80
Width (mm)	80
Prod_Type3	TRBSR_MD_A
Bearing number	30334
Bore Diameter (mm)	170
Outer Diameter (mm)	360
Calculation factor (e)	0,37
Calculation factor (Y0)	0,9
(Oil) Lubrication Speed	1300 r/min
(Grease) Lubrication Speed	950 r/min
Basic dynamic load rating (C)	845 kN
Basic static load rating (C0)	1080 kN