


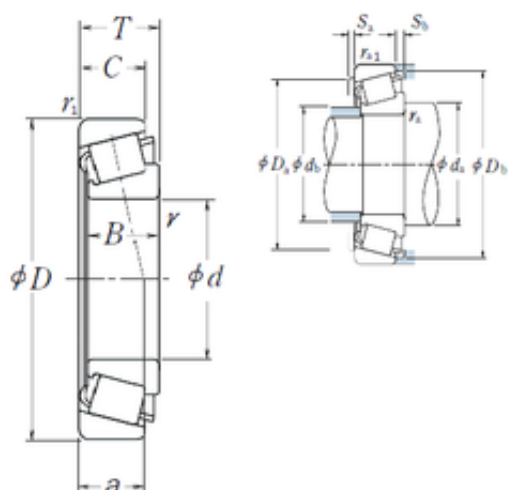

Bearing No. 30334D

D	360 mm
d	170 mm
T	80 mm
B	72 mm
C	50 mm
a	107,3 mm
e	0.81
Cr	77500
Y0	0.41
db	215
da	206
Y1	0.74
B_	72
Sb	30
C0	1040
Sa	10
D_	360
Z_	16
C_	50
C0r	106000
DA_	41.765
Iso	-
DE_	304.784
D_b	332
DI_	228.591
SBRG	3
SDM_	266.688
D_a2	288
KBRG	3111
yobi	30334D

D_a1	342
mass	33.4
TC-RA	344.021
r min.	5 mm
Weight	33,4 Kg
TC-DA1	44.988
TC-DA2	38.542
TC-SLR	50
Da min	288 mm
LangID	1
ALPHA_	28.5
Db min.	332 mm
Oil rpm	1200
db max.	215 mm
Da max.	342 mm
ra max.	4 mm
hidYobi	30334D
da min.	206 mm
T-ALP21	57
rb max.	3 mm
T-ALP22	0
T-ALP23	0
GRS rpm	900
inner r	5
outer r	4
r1 min.	4 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	7
inner ra	4
outer rb	3
TC-BET22	30

Size (mm)	170x360x80
Width (mm)	80
Prod_Type3	TRBSR_MD_A
Bearing number	30334D
Bore Diameter (mm)	170
Outer Diameter (mm)	360
Calculation factor (e)	0,81
Calculation factor (Y0)	0,41
(Oil) Lubrication Speed	1200 r/min
(Grease) Lubrication Speed	900 r/min
Basic dynamic load rating (C)	760 kN
Basic static load rating (C0)	1040 kN