


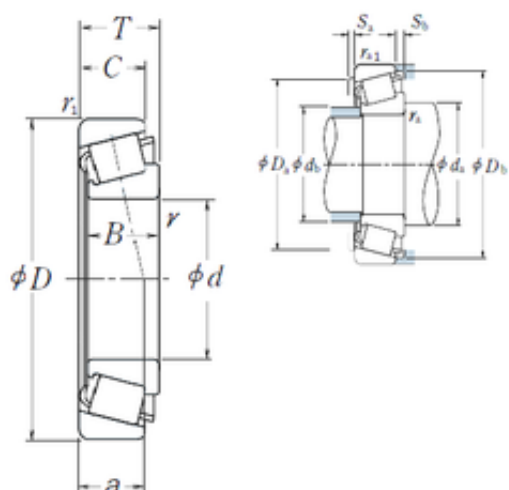

Bearing No. 30338

D	400 mm
d	190 mm
T	86 mm
B	78 mm
C	65 mm
a	76,1 mm
e	0.36
Cr	103000
Y0	0.92
db	248
da	223
Y1	1.7
B_	78
Sb	21
C0	1340
Sa	11
D_	400
Z_	15
C_	65
C0r	136000
DA_	50.206
Iso	-
DE_	349.605
D_b	366
DI_	251.911
SBRG	3
SDM_	300.758
D_a2	346
KBRG	3111
yobi	30338

D_a1	378
mass	46
TC-RA	777.375
r min.	6 mm
Weight	46 Kg
TC-DA1	51.996
TC-DA2	48.415
TC-SLR	54
Da min	346 mm
LangID	1
ALPHA_	13.5
Db min.	366 mm
Oil rpm	1200
db max.	248 mm
Da max.	378 mm
ra max.	5 mm
hidYobi	30338
da min.	223 mm
T-ALP21	27
rb max.	4 mm
T-ALP22	0
T-ALP23	0
GRS rpm	850
inner r	6
outer r	5
r1 min.	5 mm
hidTable	ecat_NSTPRM
TC-BET23	0
TC-BET21	3
inner ra	5
outer rb	4
TC-BET22	50

Size (mm)	190x400x86
Width (mm)	86
Prod_Type3	TRBSR_MD_A
Bearing number	30338
Bore Diameter (mm)	190
Outer Diameter (mm)	400
Calculation factor (e)	0,36
Calculation factor (Y0)	0,92
(Oil) Lubrication Speed	1200 r/min
(Grease) Lubrication Speed	850 r/min
Basic dynamic load rating (C)	36,8 kN
Basic static load rating (C0)	1340 kN