


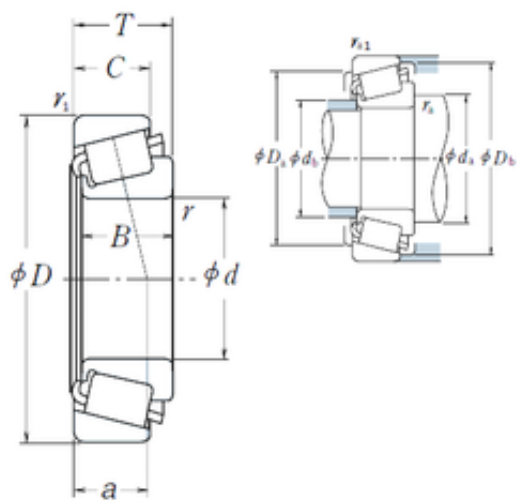

Bearing No. HM516448/HM516410

e	0.4
d	82,55 mm
D	133,35 mm
T	39,688 mm
B	39,688 mm
C	32,545 mm
a	32,4 mm
Da	118 mm
B_	39.688
Db	128 mm
da	105 mm
Y0	0.82
db	92 mm
C0	310
D_	133.35
Z_	25
C_	32.545
Y1	1.5
DE_	117.751
SLR	31.5
D_a	118
DI_	97.222
DA1	11.335
DA2	9.872
CUP	0.767
DA_	10.605
D_b	128
RAr	243.565
SDM_	107.653
KBRG	3161

yobi	HM516448/HM516410
CONE	1.35
ALP21	30
ALP22	0
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	40
r min.	6,8 mm
LangID	1
Weight	2,117 Kg
ALPHA_	15
r1 min.	3,3 mm
ra max.	6,8 mm
Oil rpm	3600
outer r	3.3
hidYobi	HM516448/HM516410
GRS rpm	2600
inner r	6.8
hidTable	ecat_NSTPRI
inner ra	6.8
outer rb	3.3
ra1 max.	3,3 mm
Size (mm)	82.55x133.35x39.688
SHOG_yobi	HM516448R/HM516410 R
Prod_Type3	TRBSR_ID_A
Width (mm)	39,688
Bearing number	HM516448/HM516410
Bore Diameter (mm)	82,55
Outer Diameter (mm)	133,35
Calculation factor (e)	0,4

(Oil) Lubrication Speed	3600 r/min
Calculation factor (Y0)	0,82
(Grease) Lubrication Speed	2600 r/min
Basic static load rating (C0)	310 kN
Basic dynamic load rating (C)	179 kN