


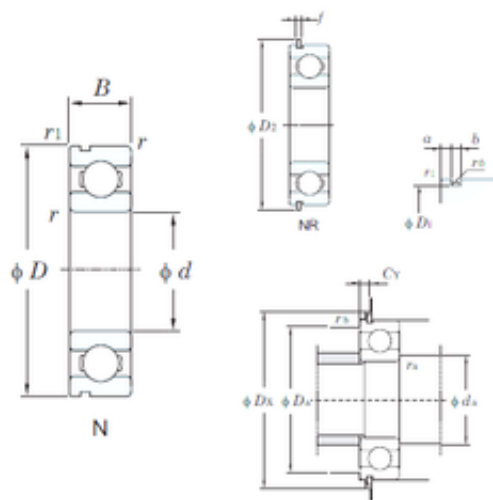

Bearing No. 6014NR

f	2,41 mm
d	70 mm
D	110 mm
B	20 mm
C	20 mm
a	2,87 mm
b	2,85 mm
Cr	47.6
f0	15.6
Cu	1.80
D2	116,6 mm
D1	106,81 mm
C0r	30.9
Bore	2.756 Inch 70 Millimeter
Noun	Bearing
r min.	1,1 mm
r(min)	1.1
UNSPSC	31171504
Weight	0,602 Kg
r1(min)	0.5
da(min)	76.5
D2(min)	116.6
Da(max)	103.5
rb(max)	0.5
ra(max)	1
Dx(min)	118
r0 max.	0,6 mm
r1 min.	0,5 mm
da min.	76,5 mm

Cy(max)	5.03
Da max.	103,5 mm
Category	Single Row Ball Bearing
Oil lub.	7200
Snap Ring	Yes
Size (mm)	70x110x20
Inventory	0.0
Enclosure	Open
Width (mm)	20
Grease lub.	6100
f{0.05)	2.41
Bearing No.	6014NR
Weight / LBS	1.32718
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
Bearing number	6014NR
Other Features	Deep Groove With Snap Ring
Keyword String	Ball
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Manufacturer URL	http://www.koyousa.com
Outside Diameter	4.331 Inch 110 Millimeter
(Refer.)Mass(kg)	0.602
Long Description	70MM Bore; 110MM Outside Diameter; 20MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage

Outer Race Width	0.787 Inch 20 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.684
Manufacturer Name	KOYO
Internal Clearance	C0-Medium
Bore Diameter (mm)	70
Outer Diameter (mm)	110
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
(Oil) Lubrication Speed	7200 r/min
Internal Special Features	No
(Grease) Lubrication Speed	6100 r/min
Basic static load rating (C0)	30,9 kN
Basic dynamic load rating (C)	38,1 kN
Maximum Capacity / Filling Slot	No