


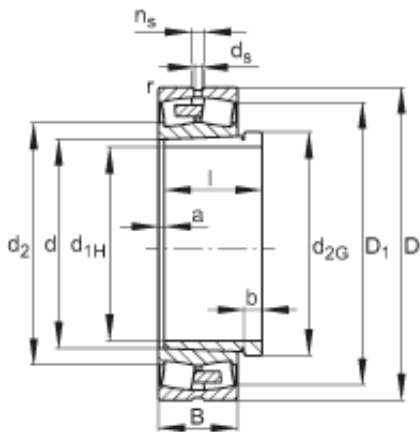

Bearing No. 23072-E1A-K-MB1 + AH3072G-H

l	167 mm
e	0,22
D	540 mm
B	134 mm
a	9 mm
b	30 mm
m	104 kg / Weight
d	360 mm
Size (mm)	340x540x134
Width (mm)	134
d_s	12,5 mm
C_r	2800000 N / Dynamic load rating (radial)
n_s	23,5 mm
D_1	487,6 mm
Y_1	3,04
Y_2	4,53
Y_0	2,97
n_G	1300 1/min / Limiting speed
n_B	800 1/min / Reference speed
m_1	20,5 kg / Weight, withdrawal sleeve
C_{0r}	4650000 N / Static load rating (radial)
Bearing number	23072-E1A-K-MB1 + AH3072G-H
d_{1H}	340 mm
d_{2G}	Tr380X5

C _{ur}	390000 N / Fatigue limit load, radial
r _{min}	5 mm
r _{a max}	4 mm
d _{a min}	378 mm
D _{a max}	522 mm
Bore Diameter (mm)	340
Outer Diameter (mm)	540
- AH3072G-H / Designation, withdrawal sleeve	AH3072GH / Designation, withdrawal sleeve