


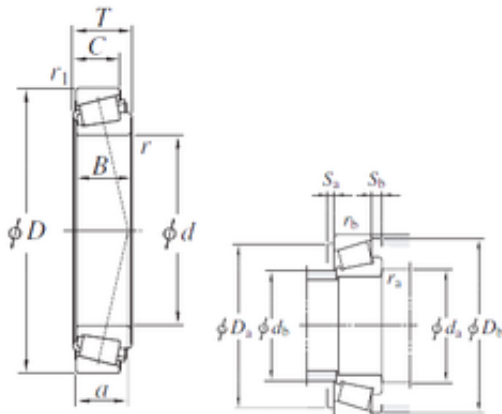

Bearing No. HM266449/HM266410

|                               |                       |
|-------------------------------|-----------------------|
| C                             | 82,55 mm              |
| d                             | 384,175 mm            |
| D                             | 546,1 mm              |
| T                             | 104,775 mm            |
| B                             | 104,775 mm            |
| a                             | 97,6 mm               |
| Db                            | 515 mm                |
| Da min                        | 505 mm                |
| Weight                        | 78 Kg                 |
| r min.                        | 6,4 mm                |
| db max.                       | 421 mm                |
| Da max.                       | 525 mm                |
| r1 min.                       | 6,4 mm                |
| da min.                       | 404 mm                |
| rb max.                       | 6,4 mm                |
| ra max.                       | 6,4 mm                |
| Size (mm)                     | 384.175x546.1x104.775 |
| Width (mm)                    | 104,775               |
| Bearing number                | HM266449/HM266410     |
| Bore Diameter (mm)            | 384,175               |
| Outer Diameter (mm)           | 546,1                 |
| Calculation factor (e)        | 0,33                  |
| Calculation factor (Y0)       | 0,99                  |
| Basic dynamic load rating (C) | 1900 kN               |
| Basic static load rating (C0) | 4210 kN               |