


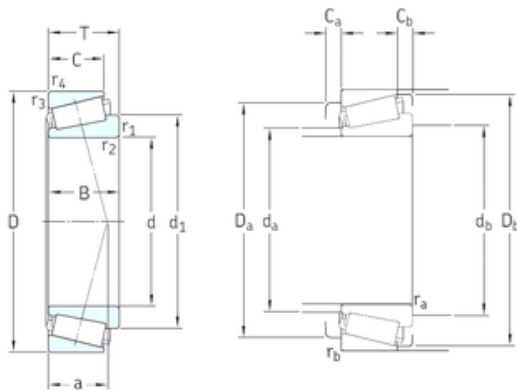

Bearing No. HM262749/710

D	488,95 mm
d	346,075 mm
T	95,25 mm
B	95,25 mm
C	74,612 mm
a	88 mm
d1	413 mm
Weight	55 Kg
db min	378 mm
Da min	442 mm
da max	379 mm
Ca min.	12 mm
Cb min.	21 mm
Db min.	467 mm
Da max.	472 mm
r1 min.	6,4 mm
r4 min.	3,3 mm
r3 min.	3,3 mm
r2 min.	6,4 mm
rb max.	3,1 mm
ra max.	6 mm
Size (mm)	346.075x488.95x95.25
Width (mm)	95,25
Limiting speed	1300 r/min
Bearing number	HM262749/710
Reference speed	850 r/min
Bore Diameter (mm)	346,075
Outer Diameter (mm)	488,95
Calculation factor (e)	0,33
Calculation factor (Y)	1,8

Fatigue load limit (Pu)	255
Basic dynamic load rating (C)	1420 kN
Basic static load rating (C0)	3150 kN