


loyal

Bearing Housing Units-Double V-Lock Cartridge Block | QVVMC17V070S

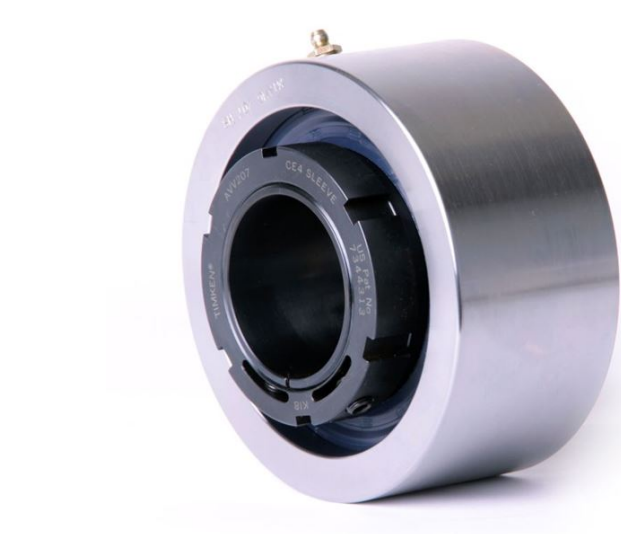

Bearing No. QVVMC17V070S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Metric                                                                                                                 |
| Bearing Number            | 4.57                                                                                                                   |
| Housing Construction      | 3.07                                                                                                                   |
| UPC Code                  | 26 lb11.80 Kg                                                                                                          |
| Shaft Size Type           | 0883450150965<br>0883450151115<br>0883450158992<br>0883450160032<br>0883450180177<br>0883450181167<br>0883450199650 08 |
| Full Timken Part Number   | 0.0020 in0.051 mm                                                                                                      |
| Locking Style             | 70 mm                                                                                                                  |
| Y2 - Geometry Factor      | 0.0037 in0.095 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0047 in0.120 mm                                                                                                      |
| Shaft Tolerance           | 2400 rpm                                                                                                               |
| Shaft Size                | 1400 rpm                                                                                                               |
| Pre Install Clearance Min | 1100 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |