


loyal

Bearing Housing Units-Double V-Lock Cartridge Block | QVVMC22V312S

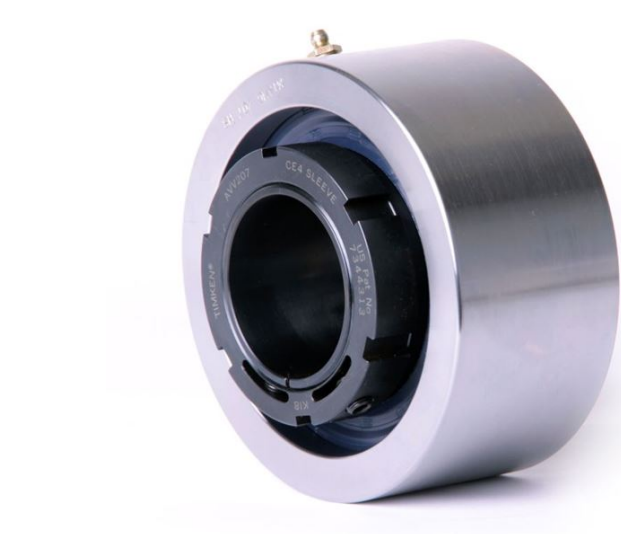

Bearing No. QVVMC22V312S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.06                                                                                                                   |
| Housing Construction      | 2.73                                                                                                                   |
| UPC Code                  | 40.0 lb18.1 Kg                                                                                                         |
| Shaft Size Type           | 0883450151023<br>0883450151177<br>0883450159081<br>0883450161855<br>0883450181075<br>0883450181303<br>0883450199858 08 |
| Full Timken Part Number   | 0.0030 in0.076 mm                                                                                                      |
| Locking Style             | 3-3/4 in                                                                                                               |
| Y2 - Geometry Factor      | 0.0053 in0.135 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0067 in0.170 mm                                                                                                      |
| Shaft Tolerance           | 1700 rpm                                                                                                               |
| Shaft Size                | 900 rpm                                                                                                                |
| Pre Install Clearance Min | 600 rpm                                                                                                                |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |