


loyal

Bearing Housing Units-Double V-Lock Cartridge Block | QVVMC26V110S

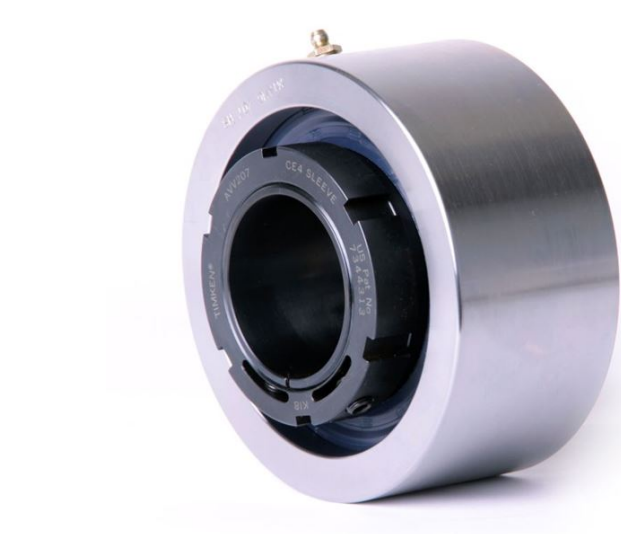

Bearing No. QVVMC26V110S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Metric                                                                                                                 |
| Bearing Number            | 3.90                                                                                                                   |
| Housing Construction      | 2.62                                                                                                                   |
| UPC Code                  | 52 lb23.60 Kg                                                                                                          |
| Shaft Size Type           | 0883450071246<br>0883450071314<br>0883450287661<br>0883450287685<br>0883450289184<br>0883450289207<br>0883450290708 08 |
| Full Timken Part Number   | 0.0050 in0.127 mm                                                                                                      |
| Locking Style             | 110 mm                                                                                                                 |
| Y2 - Geometry Factor      | 0.0053 in0.135 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0067 in0.170 mm                                                                                                      |
| Shaft Tolerance           | 1500 rpm                                                                                                               |
| Shaft Size                | 700 rpm                                                                                                                |
| Pre Install Clearance Min | 400 rpm                                                                                                                |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |