


# g Housed Units-Single Concentric Two-Bolt Pillow Block | QAPL11A203S

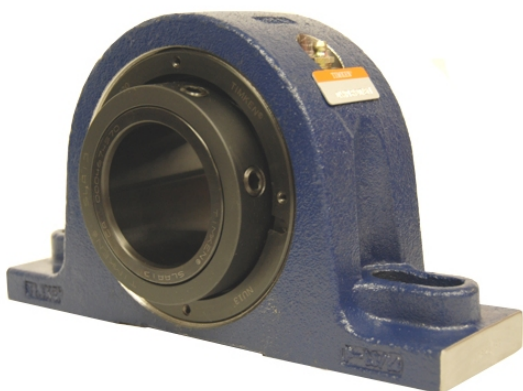

**Bearing No. QAPL11A203S**

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Imperial                                                                                                               |
| Bearing Number            | 4.40                                                                                                                   |
| Housing Construction      | 2.95                                                                                                                   |
| UPC Code                  | 17.0 lb7.7 Kg                                                                                                          |
| Shaft Size Type           | 0013992131454<br>0883450047203<br>0883450047210<br>0883450047234<br>0883450047241<br>0883450047258<br>0883450047265 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 2-3/16 in                                                                                                              |
| Y2 - Geometry Factor      | 0.0016 in0.040 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0026 in0.065 mm                                                                                                      |
| Shaft Tolerance           | 3800 rpm                                                                                                               |
| Shaft Size                | 2200 rpm                                                                                                               |
| Pre Install Clearance Min | 1600 rpm                                                                                                               |
| Pre Install Clearance Max | Single Concentric                                                                                                      |