


# ing Housed Units-Double V-Lock Four-Bolt Pillow Block | QVVPH13V055S

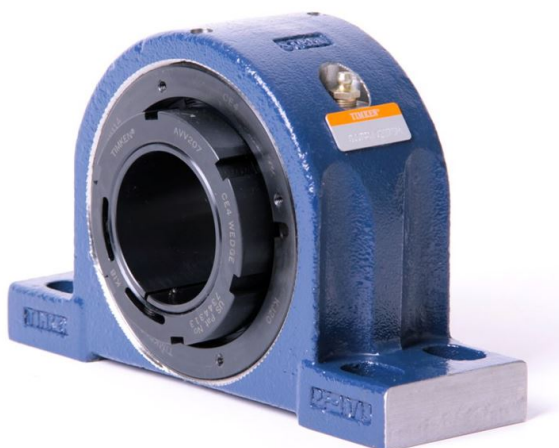

Bearing No. QVVPH13V055S

|                           |                                                                                                                        |
|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Weight                    | Metric                                                                                                                 |
| Bearing Number            | 4.15                                                                                                                   |
| Housing Construction      | 2.79                                                                                                                   |
| UPC Code                  | 25 lb11.3 Kg                                                                                                           |
| Shaft Size Type           | 0883450148658<br>0883450148849<br>0883450153348<br>0883450153492<br>0883450176330<br>0883450176538<br>0883450185547 08 |
| Full Timken Part Number   | 0.0015 in0.038 mm                                                                                                      |
| Locking Style             | 55 mm                                                                                                                  |
| Y2 - Geometry Factor      | 0.0030 in0.076 mm                                                                                                      |
| Y1 - Geometry Factor      | 0.0037 in0.094 mm                                                                                                      |
| Shaft Tolerance           | 3200 rpm                                                                                                               |
| Shaft Size                | 1800 rpm                                                                                                               |
| Pre Install Clearance Min | 1500 rpm                                                                                                               |
| Pre Install Clearance Max | Double V-Lock                                                                                                          |